



Eagle Jumbo Co.,Ltd. General Industry Co.,Ltd.

232# Chang'an Avenue, Deqing ,Huzhou, Zhejiang,
China, 313200

Tel: +86-572-8682-999

Fax: +86-572-8682-777

E-Mail: luqhchain@163.com Mr. Lu

cam_fang@126.com Mr. Fang

Website: www.eaglejumbo.com



Eagle Jumbo Co.,Ltd.
General Industry Co.,Ltd.

2018



Eagle Jumbo Co.,Ltd. General Industry Co.,Ltd.

General Industry Co., Ltd. (Internationally, “Eagle Jumbo Co.,Ltd.”) is devoted to building quality tire chains and link chains. With 26-years of experience, we have set up a highly professional team with fully automated and modernized production lines consisting of robotic welders, forming machinery, and heat-treating furnaces. Through continuous testing and refinement of the chain manufacturing process, we have emerged as leaders in the field of link chain manufacturing today.

Our diverse product portfolio includes forestry chains, flail chains, tracks, tire protection chains, anti-skid chains, and more; our products are made to protect tractors, trucks, and passenger vehicles as well as for industrial purposes. We put utmost priority on delivering high quality and highly consistent products. Our worldwide partners supply our products to their customers with great pride. Through our partners Quality Chain Corp USA and QC Canada, we have won competitive bids to build tire chains for the U.S. Government and the Canadian Army, serving as a testimony to our high quality guarantee.

Our aim is to supply our partners with quality products and service at competitive prices. We invite you inquire about our products and to join us as partners. Together, we can chain up for a brighter future!



STANDARD CHAIN SPECS

 FORESTRY	P 1-10
 TRACTOR	P 11-22
 TPC	P 23
 TRUCKS – SUV	P 24-38
 PASSENGER	P 39-46
 A.T.V	P 47-48





Quality Tracks



Quality Tracks

Model	Fitting Tire Size	Numbers of Cross Bar(pcs/1/2pair)
MT86	600/50-22.5	30
	710/45-22.5	29
	600/50-24.5	31
	710/40-24.5	30
	600/55-26.5	34
	710/45-26.5	33
	800/40-26.5	33
	750/55-26.5	38
	750/50-26.5	36
	710/55-28.5	38
	780/50-28.5	38



MT86

MT86 is forged of quality boron steel, compact heavy-duty. Your machine will go forward easily regardless of obstacles



MT86



MT86+FF150

With wider cross bars among the chain system, the machine can load more and gain better traction



FF150



MT86





Model	Fitting Tire Size	Numbers of Cross Bar(pcs/1/2pair)
OV88	600/50-22.5	30
	710/45-22.5	29
	600/50-24.5	31
	710/40-24.5	30
	600/55-26.5	34
	710/45-26.5	33
	800/40-26.5	33
	750/55-26.5	38
	750/50-26.5	36
	710/55-28.5	38
	780/50-28.5	38

Model	Fitting Tire Size	Numbers of Cross Bar(pcs/1/2pair)
SF120	600/50-22.5	30
	710/45-22.5	29
	600/50-24.5	31
	710/40-24.5	30
	600/55-26.5	34
	710/45-26.5	33
	800/40-26.5	33
	750/55-26.5	38
	750/50-26.5	36
	710/55-28.5	38
	780/50-28.5	38



OV88



SF120



OV88

With ribs on surface,OV88 has the best traction



SF120

With extended cross bars, SF120 the best floatation



Triple Diamond U-Stud Chains

Stock#	Fitting Tire Size	Wt./pair(kg)
TDU-14	500/45-22.5	186
	700/45-22.5	271
	600/65-25	231
	700/40-22.5	251
	600/60-30.5	335
	650/65-26.5	354
	750/55-26.5	364
	710/45-26.5	321
	18.4-26,16.9-30	255
	23.1-26,18.4-34	326
	17.5-25 std	200
	700/50-26.5	310
	700/55-34	383
	500/60-22.5	206
	600/50-22.5	267
	600/55-26.5	296
TDU-16	600/65-34	341
	780/55-28.5	394
	750/45-30.5	472
	650/65-26.5	445
	600/60-30.5	473
	700/70-34	626
	750/55-26.5	452
	700/50-30.5	475
	700/45-22.5	384
	710/45-26.5	410
	700/50-26.5	485
	28.1-26,700/55-34	535
	23.1-26	386
	24.5-32,23.1-34	472
	23.5-25 std	410
	23.5-25 L5	422
TDU-18	30.5-32	502
	26.5-25 Std	495
	600/55-26.5	380
	600/65-34	531
	780/55-28.5	488
	710/45-26.5	706
	700/50-26.5	596
	700/55-34	699
	24.5-32,23.1-34	684
	30.5-32	709
TDX	750/55-26.5	624
	35.5-32	823
	73x44.00-32	895



TDU chains



TDUX chains



Double Diamond Non-Stud Skidder Chain


Stock#	Fitting Tire Size	Wt./pair(kg)
NLN-14/16/18	235*25-14	324
	205*25-16	428
	235*25-16	438
	245*32-16	482
	265*25-16	510
	295*25-16	533
	305*32-16	532
	1800*25-16	454
	265*25-18	694
	295*25-18	724
	305*32-18	723
	35/65-18	821



NLN-14/16/18

Triple Diamond with U-Grip

Stock#	Fitting Tire Size	Wt./pair(kg)
NCTU-16/18/20	NLTU305*32-16	757
	NLTU355*32-16	791
	NLTU73*44*32-16	789
	NLTU305*32-18	1064
	NLTU355*32-18	1097
	NLTU73*44*32-18	1103
	NLTU305*32-20	1235
	NLTU355*32-20	1270
	NLTU73*44*32-20	1261

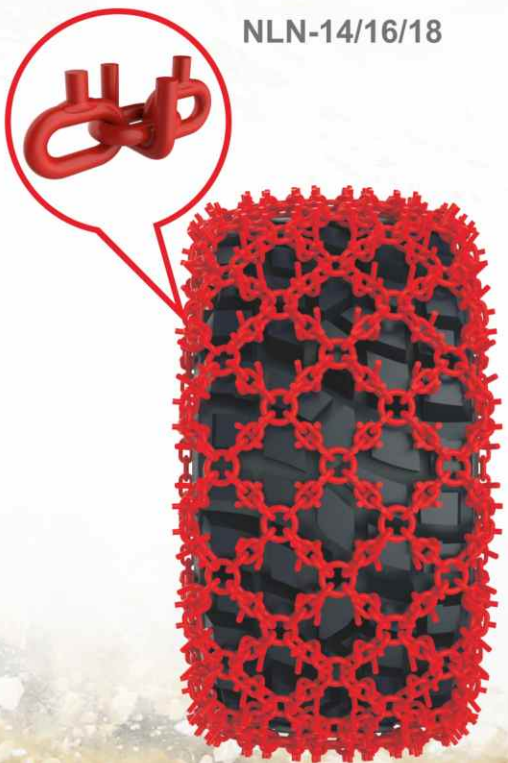

NCTU

Skidder Chain

Double Diamond I-Bar with U-Grip Skidder Chain

Stock#		Wt./pair(kg)
NLU-16	NLU235*25-16	520
	NLU245*32-16	571
	NLU265*25-16	605
	NLU295*25-16	626
	NLU305*32-16	625
NLU-18	NLU35/65-16	700
	NLU245*32-18	774
	NLU265*25-18	823
	NLU295*25-18	852
	NLU73*44*32-18	896
NLU-20	NLU355*32-18	905
	NLU35/65-18	960
	NLU245*32-20	883
	NLU305*32-20	966
	NLU355*32-20	1019
NLT-16/18/22	NLTS305*32-16	667
	NLTS355*32-16	702
	NLTS73*44*32-16	706
	NLTS305*32-18	954
	NLTS355*32-18	972
	NLTS73*44*32-18	980
	NLTS305*32-20	1077
	NLTS355*32-20	1112
	NLTS73*44*32-20	1116



NLU

Double Diamond I-Bar Stud Skidder Chain

Stock#	Fitting Tire Size	Wt./pair(kg)
NLS-14	700/45-22.5	242
	18.4-30,16.9-34	314
	18.4-34,16.9-38	305
	18.00-24/25 STD	345
	700/50-26.5	288
	23.5-25 L5	370
	500/50-22.5	212
	22/65-25,500/55-26.5	259
	18.4-34,16.9-38	468
	18.00-24/25 STD	502
NLS-16	700/50-26.5	393
	700/55-34	506
	23.1-26	412
	24.5-32,23.1-34	467
	23.5-25 L5	481
	30.5-32	517
	26.5-25 STD	563
	22/65-25,500/55-26.5	412
	600/65-34	506
	73/44,00x32	768
NLS-18	66/43,00x25/26 DD	866
	NLS245*32-18	695
	NLS265*25-18	737
	NLS295*25-18	767
	NLS305*32-18	766
	NLS355*32-18	820
	NLS35/65-18	851
NLS-20	NLS35/65-18	869
	NLS73*44*32-18	820
	NLS245*32-20	783
	NLS305*32-20	860
	NLS355*32-20	913
	NLS2700-20	1227
	NLS3300-20	1585
	NLS3600-20	1780



NLS





Double Ring Alloy Skidder Chain 25mm Tag Chain

Stock#	Fitting Tire Size	Wt./pair(kg)	Remarks
RAM305-25	305x32	850	the main lug ring 38x280,
RAM355-25	355x32	970	the side lug ring 32x180
RAM7300-25	7300x44x32	930	

Multi-Ring Floating Alloy Skidder Chain 25mm Tag Chain


Stock#	Fitting Tire Size	Wt./pair(kg)	Remarks
RAFT305-25	305x32	853	the main lug ring 38x280,
RAFT355-25	355x32	963	the side lug ring 32x180
RAFT7300-25	7300x44x32	952	



RAFT



RAM

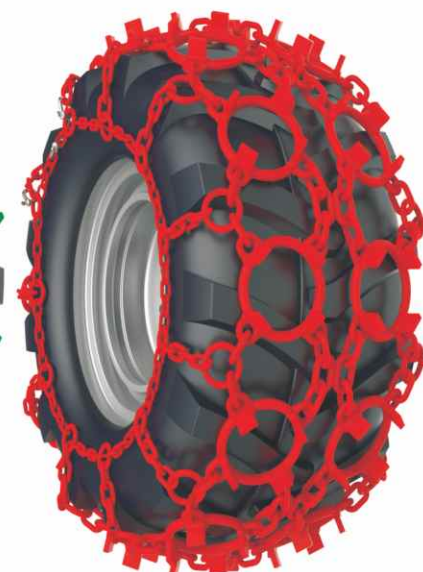

RAD



RA

GS14

12mm side chain + 14mm chain net

Stock#	Fitting Tire Size	Wt./pair(kg)
180207	18.4-34	299
180208	18.4-38	317
180261	20.5-25	276
180324	22/65-25; 650/60-26.5; 600/60-30.5	271
180346	23.1-26; 23.5-25; 620/75-26; 650/65-26.5; 600/60-38; 600/65-34	293
180348	23.1-34; 23.5-25; 24.5-25; 26.5-25;	354
180473	28-26; 700/65-30.5	333
180518	30.5-32; 620/70-42	391
180782	500-15.5; 500/45-22.5	174
180771	500/50-26.5; 500/60-22.5; 600/50-22.5	194
180773	500/60-26.5	216
180779	500/65-28	235
180810	550/45-22.5	187
180852	600/55-26.5; 650/60-26.5; 650/65-26.5; 600/60-30.5; 600/60-38; 600/65-34	244
180873	600/65-38; 620/70-42; 650/65-38; 650/45-22.5; 24.5-25;	315
180919	650/75-38	396
180933	700/40-22.5; 700/45-22.5; 650/45-22.5; 750/45-22.5; 710/40-22.5	202
180937	700/50-26.5; 740/45-26.5; 710/50-26.5	267
180938	700/50-30.5	287
180940	700/55-22.5; 700/50-26.5	242
180972	750/55-34; 700/65-30.4	331
180948	700/70-34	375
180960	750/50-34	333
180959	750/55-26.5	290
180962	800/40-26.5	254
180980	800/45-30.5	300
180981	800/55-30.5	343

The chain is made of quality alloy of boron, titan and Manganese. With U-Bar at every horizontal link, it is ideal for good traction in severe condition for tractor, loader, grader and skidder.

Excellent working performance and increased traction on difficult driving surfaces due to the high U-Bars
Good self-cleaning properties due to the chain mesh design for deep treads.
Extremely high grip and long working life.
Size adjustment for different profile heights.



U-Bar





GSU14

12mm side chain + 14mm chain net

Stock#	Fitting Tire Size	Wt./pair(kg)
179207	18,4-34	281
179208	18,4-38	298
179261	20,5-25	259
179324	22/65-25	255
179346	23,1-26; 23,5-25; 620/75-26; 600/60-38; 600/65-35	276
179348	23,1-34; 23,5-25; 26,5-25	333
179473	28-26; 700/65-30,5	313
179518	30,5-32	368
179782	500-15,5; 500/50-22,5	163
179771	500/45-26,5; 500/60-22,5	202
179773	500/60-26,5	203
179810	550/45-22,5; 620/75-26; 600/50-22,5	176
179852	600/55-26,5; 600/60-30,5; 600/60-38; 600/65-35	229
179873	600/65-38; 650/65-38; 650/45-22,5; 700/40-22,5; 700/45-22,5	296
179937	700/50-26,5	252
179938	700/50-30,5	272
179940	700/55-22,5	228
179942	700/55-34; 700/65-30,5	311
179948	700/70-34	352
179933	710/40-22,5; 650/45-22,5; 700/40-22,5; 700/45-22,5	193
179960	750/50-34	313
179959	750/55-26,5; 750/65-26,5	273
179980	800/45-30,5	283
179981	800/55-30,5; 750/65-26,5	323

The double-diamond chain net is made of 14mm link & 16mm ring. It is ideal for increase of traction on difficult surface with snow/ice. All links are made of boron, titan and manganese alloy. All links are perfectly hardened.



GSG14

12mm side chain + 14mm chain net

Stock#	Fitting Tire Size	Wt./pair(kg)
181207	18,4-34	360
181208	18,4-38	383
181261	20,5-25	333
181324	22/65-25; 600/60-30,5; 700/55-26,5	334
181395	22/65-25	334
181346	23,1-26; 23,5-25; 600/60-38; 600/65-34; 620/75-26	361
181348	23,1-34; 23,5-25; 26,5-25	438
181473	28-26; 700/65-30,5	411
181518	30,5-32	494
181782	500/60-15,5; 500/45-22,5	209
181771	500/50-26,5; 500/60-22,5	259
181773	500/60-26,5; 600/50-22,5	260
181810	550/45-22,5; 600/50-22,5	222
181852	600/55-26,5; 600/60-30,5; 600/60-38; 600/65-34	301
181873	600/65-38; 620/75-26; 650/65-38; 650/45-22,5; 700/40-22,5; 700/45-22,5	363
181937	700/50-26,5	310
181938	700/50-30,5; 700/55-30,5	335
181940	700/55-22,5; 710/45-22,5	281
181942	700/55-34; 700/65-30,5	384
181948	700/70-34	434
181933	710/40-22,5; 650/45-22,5; 700/40-22,5; 700/45-22,5	234
181949	710/40-24,5; 710/45-22,5	259
181960	750/50-34	385
181959	750/55-26,5	337
181980	800/45-30,5	357

The triple-diamond chain is made of quality alloy of boron, titan and Manganese. With U-Bar at every horizontal link and extra cross chains, it provides better traction and stable driving. One of best choices for tractor, loader, grader and skidder.





NSG-Tractor

Net Studded Tractor Chain

8mm-NSG

Fitting Tire Size	Wt./pair(kg)
400/60-15.5	54
19/45-17	55
500/50-17	56
10.00-20	58
31x13.5-15	43
31x15.5-15	45
10/75-16	46
10.5-18, 10.5/80-18	48
10.5-20	49
12.5-18, 335/80-18	55
10.00-20, 12.5-20, 340/75-20	59
15-19.5	59
12R-19.5	60
14/80-20, 14.5-20, 375/75-20	62
11/65-12	36
10/75-15.3, 10.5/70-15.3	40
11.5/80-15.3, 11-16, 10-16.5	46
12.4-16, 12.5/80-18	54
13.6-16, 12.5/80-20, 38x14-20	53
14/65-16	45
33x15.5-15, 15/55-17	47
15.5/55-18	52
15.5/65-18	58
8.00-20, 8.25-20	46
8.00-16, 8.30-16	34
8.00-18, 7.5-20, 8.3-20	48
8.3-24	51
8.3-36	66
9.5-20	47
9.5-24	55
9.5-42	79
600/40-22.5	73
16.5/85-28	84
340/65-18	50
44x18-20, 445/65-22.5	74
420/65-24	69
440/65-28	83
480/65-24	69
480/65-28	83
540/65-24	68
540/65-34	100
600/60-30	100
600/65-38	115
240/70-16	39
405/70-18	64
16/70-20, 405/70-20, 420/65-20	64
305/70-19.5, 300/70-20	50
320/70-24	59
335/80-20, 360/70-20	61
360/70-24	67
38x14.5-16, 14-17.5, 365/70-18	58
365/85-20, 380/70-20	63
380/70-24, 405/70-24	71
380/70-28	76
420/70-24, 440/70-24, 445/70-24	74
420/70-30	84
16-24/25-Std, 480/70-30	92
480/70-34	94
260/80-20, 280/70-20	47
355/80-20	66
11.2-20, 320/70-20	55
10.00-24, 11.2-24	57
11.2-28	71
12.4-20, 300/70-24	59
12.4-24, 320/85-24	63
12.4-28	68
12.4-32	73
12.4-36, 11.2-38	78
13.6-24	65
13.6-28	73
13.6-36	84
13.6-38, 340/85-38	86

Fitting Tire Size	Wt./pair(kg)
14.9-24, 380/85-24	70
14.9-28	75
16.9-34, 14.9-38	91
16.9-28	84
16.9-30, 420/70-34	89
18.4-30, 16.9-34	85
580/85-38	106
550/45-22.5	66
710/60-42	144
525/65-20.5	73
550/60-22.5	77
16.9-24, 17.5-25, 400/80-28	79
23.5-25	97



NSG

- * 8mm, 9.5mm, 11mm and 13mm cross patterns
- * Best for aggressive off-road applications
- * Hardened boron alloy steel for maximum life

9.5mm wire

Fitting Tire Size	Wt./pair(kg)
11.2-20, 9.5-22	68
11.2-24	75
11.2-28	83
12.4-24, 340/80-24	75
12.4-28	81
12.4-32	86
12.4-36	92
12.5/80-18, 12.5-18, 320/70-20	65
13.6-24, 360/80-24	79
13.6-28, 13.00-24	84
13.6-36	99
13.6-38	105
14.5-20, 375/75-20, 320/70-24	71
14.9-24, 400/80-24	86
14.9-28, 14.00-24, 400/80-28	93
14.9-30	98
14.9-38, 15.5-38	109
16.9-30, 18.4-26, 440/80-30	101
16.9-34, 18.4-30, 440/80-34, 480/80-30	109
16.9-38, 18.4-34, 480/80-34	116
400/70-20, 405/70-20, 16/70-20	75
420/65-24	81
420/70-28, 380/85-28	96
500/65-28, 480/70-26, 480/65-28	98



11mm wire

Fitting Tire Size	Wt./pair(kg)
13.6-24, 360/80-24	103
13.6-28, 13.00-24	111
13.6-36	129
13.6-38	138
14.9-24, 400/80-24	110
14.9-26, 15.5-25	118
14.9-28, 14.00-24, 400/80-28	119
14.9-30	127
14.9-38, 15.5-38	144
16.9-24, 16.9-26, 17.5-25, 440/80-24	124
16.9-28, 440/80-28	132
16.9-30, 18.4-26, 16.00-24, 440/80-30	132
16.9-34, 18.4-30, 440/80-34, 480/80-30	142
16.9-38, 18.4-34, 480/80-34	154
18.4-38, 20.8-34, 480/80-38	164
20.5-25, 600/55-30.5	148
20.8-38, 540/80-38	186
20.8-42	196
23.1-26, 23.5-25	173
360/70-24, 320/85-24	118
380/70-24, 405/70-24, 16/70-24	107
380/70-28, 340/85-28	116
420/70-24, 380/85-24	115
420/70-28, 380/85-28	124
420/70-30, 380/85-30	132
440/65-24, 460/65-24	110
440/65-28	119
480/65-24	121
480/65-28, 480/70-26, 500/65-28	131
480/70-24, 420/85-24	130
480/70-28, 420/85-28	140
480/70-30, 520/70-26, 420/85-30	141
480/70-34, 520/70-30, 460/85-30	158
480/70-38, 520/70-34, 460/85-34	168
520/70-38, 460/85-38	170
540/65-24, 540/60-26.5	135
540/65-28, 555/70-25	146
540/65-30	147
540/65-34	158
540/65-38	168
540/70-30	155
540/70-38, 540/75-38	179
580/70-38, 520/85-38, 520/85-38	194
580/70-42	204
600/60-38	175
600/65-28, 600/60-30.5	162
600/65-30	164
600/65-34	174
600/65-38, 650/65-34	185
650/60-38	186
650/65-38, 650/75-34	197
650/65-42, 620/70-42	207



NSG-Tractor

Tire Size (11mm)-Double

Fitting Tire Size	Wt./pair(kg)
14.9-24	168
14.9-28, 14.00-24	180
14.9-38, 15.5-38	218
16.9-28	204
16.9-30, 18.4-26, 16.00-24	205
16.9-34	230
16.9-38	250
18.4-30	235
18.4-34	257
18.4-38	270
20.5-25, 540/70-30	240
20.8-38	300
23.1-34	279
23.5-25	284
28.1-26 (28L-26)	280
400/60-15.5, 400/55-17.5	125
400/55-22.5	148
420/70-28	195
480/70-28, 420/85-28	185
480/70-28, 420/85-28	222
480/70-34, 520/70-30	244
480/70-38, 520/70-34, 520/75-34	267
500/45-22.5 kiristysk.	169
500/60-15.5	149
500/60-22.5	185
500/60-26.5	199
500/65-26.5	210
500/65-28, 480/70-26, 480/65-28	211
505/50-26.5	173
520/65-24, 495/70-24, 19.5RL24	209
520/70-38	287
540/60-26.5, 540/65-24	217
540/65-26	228
540/65-30	240
540/65-34	254
540/65-38	276
550/45-22.5	176
600/50-22.5	201
600/55-26.5	237
600/60-38	257
600/65-34	246
600/65-38	263
620/75-30	266
650/60-38	268
650/65-26.5	231
650/65-38	284
650/65-42	298
650/75-38	317
700/45-22.5	211
700/55-34	264
700/70-34, 700/65-38	303
710/55-30	250

13mm Chain

Fitting Tire Size	Wt./pair(kg)
18.4-26, 16.9-30	192
18.4-30, 16.9-34	200
18.4-34, 16.9-38	223
18.4-38	208
600/50-22.5	157
600/55-26.5	177
500/60-22.5	147
500/60-26.5	161
20.5-25 std	193
23.5-25 std	220
26.5-25 std	252
26.5-25 L5	254
16.00-24/25 std	202
18-24/25 std	211
16-24/25 L5	204
18-24/25 L5, 600/65-34	209
750/55-26.5	213

Tire Size (triple diamonds)

Fitting Tire Size	Wt./pair(kg)
600/50-22.5	228
600/55-26.5	269
650/65-26.5	320
700/45-22.5	248
700/50-26.5	302
700/50-30.5	324
750/55-26.5	330



NSG - Tripple



GL-Tractor

Stock#	Fitting Tire Size	Wt./pair(kg)
GL7028	11.2-20;300/70-24;300/80-24;320/70-20; 335/80-20;360/70-20	42.8
GL7029	11.2-24	43.6
GL7030	11.2-28;12.4-24;320/70-24	48.6
GL7057	12.4-28;13.6-24;320/70-28;340/85-24	52.4
GL7058	12.4-32;13.00-24;13.6-28;420/85-24;	61.6
GL7083	13.6-36	67.3
GL7084	13.6-38	70.7
GL7102	14.00-24;14.9-28;14.9-30;15.5-25;420/70-28	61.4
GL7109	14.9-24	56.7
GL7135	14.9-38; 15.5-38; 16.9-34; 18.4-30; 400/75-38; 420/85-34; 480/70-30	76.8
GL7146	16/70-24; 16.9-30; 18.4-26;18.4-28; 420/85-28; 420/85-30; 480/70-26;4 80/70-28	62.5
GL7157	16.9-24;16.9-26;380/85-28;420/70-24;480/65-24	59.8
GL7159	16.9-28;17.5-25;420/70-30;440/80-24;480/65-28; 480/70-24	63.9
GL7162	16.9-38;18.4-34;460/85-34	82.5
GL7208	18.4-38;460/85-38;480/80-38	83.8
GL7261	20.5-25;540/65-34;600/65-28	76.3
GL7597	14.9-20;360/70-24;380/70-24	48.6
GL7696	440/65-24	54.1
GL7698	440/65-28;460/70-24	58.2
GL7735	480/70-34	81.6
GL7792	520/70-34;540/65-38;540/70-34	81.4
GL7794	520/70-38	83.5
GL7804	540/65-28;540/65-30;600/55-26.5	75.8
GL7823	23.5-25, 580/65-34;600/65-34	89.4
GL7822	580/70-38	96.5
GL7873	600/65-38	96
GL7911	26.5-25, 650/65-38	102.3
GL7913	650/65-42	109

GL7 chain is made of 7mm tough square link, light weighted and suitable for all operations. Being easy mounting and dismounting,the chain is a good choice in road service and yard work. Wear-bars on every other link to increase the grip and prolong service life.Other tire sizes are available, please contact us.

* 7mm square link chain net

* 7mm side chain

* 6mm cross chain hook

All are speci specially heat-treated



GL7

U10

9mm side chain+10mm square link net+11mm cross chain hook

Stock#	Fitting Tire Size	Wt./pair(kg)
156055	12.4-24	98
156057	12.4-28; 13.6-24; 14.5-20; 320/70-28	107
156058	12.4-32; 13.00-24	124
156059	12.4-36	134
156060	12.4-38; 13.00-24; 13.6-24; 13.6-36	142
156082	13.6-28; 13.6-36	116
156084	13.6-38	143
156102	14.00-24; 14.5-20; 14.9-30	124
156109	14.9-24; 405/70-24	118
156110	14.9-28; 14.9-30; 15.5-25; 380/70-28	122
156132	15.5-18; 15.5-25; 320/70-28	91
156596	360/70-20	92
156597	360/70-24; 380/70-20; 400/70-20; 405/70-18	100
156609	380/70-24; 380/70-28; 400-26.5	107
156640	400/60-15.5; 400/70-20; 405/70-18	84
156653	405/70-20; 405/70-24	102
156112	14.9-38; 15.5-38; 16.9-34	145
156157	16.9-24; 420/70-28; 420/85-24; 440/65-28; 480/70-24; 500-26.5	128
156158	16.9-26	130
156159	16.9-28; 17.5-25; 18.4-26; 440/80-28; 540/65-24	139
156160	16.9-30; 16.9-34; 480/70-28	142
156162	16.9-38; 17.5-25; 18.4-26; 18.4-30; 480/70-38	154
156207	18.4-34; 420/85-34; 480/70-34	150
156208	18.4-38	168
156261	20.5-25; 600/65-28	139
156669	420/70-24; 420/70-28; 420/85-24; 420/85-34; 440/65-24; 440/65-28; 445/70-24	118
156724	480/65-24; 445/70-24; 500-22.5	112
156726	480/65-28; 480/70-24; 480/70-28; 500/65-28; 520/65-28	120
156733	480/70-30; 480/70-34; 480/70-38; 500-22.5; 500-26.5	147
156770	500/60-15.5; 500/65-28; 520/65-28; 540/65-24	97
156805	540/65-28; 540/65-30; 555/70-25; 600/65-28; 540/65-30; 555/70-25	132

The chain is made of quality boron, titan and manganese alloy, universal chain for heavy vehicle, loader, grader, skidder and tractor.
Square-link & diamond-mesh chain provides good traction.
Reversible mesh – both wear surfaces of the chain are used. It is long-life chain.

U11

9mm side chain+10mm square link net+11mm cross chain hook

Stock#	Fitting Tire Size	Wt./pair(kg)
158266	20.8-38; 23.1-34; 580/70-38	169
158350	23.5-25; 520/70-34; 540/65-38; 540/70-34; 600/55-38; 600/60-38; 600/65-34; 620/60-30.5; 620/60-34; 620/75-26	152
158370	24.5-32; 650/65-38	171
158430	26.5-25; 520/70-34	169
158794	520/70-38; 540/65-38; 540/70-34; 580/70-38; 600/65-38	161
158850	600/50-22.5	110
158852	600/55-26.5; 600/55-38	127
158862	600/60-30.5; 600/60-38; 600/65-34; 600/65-38; 620/60-30.5; 620/60-34; 620/75-26	136
158898	625/70-25; 650/65-38	144
158942	700/55-34	160
158946	700/65-38; 710/65-38	187
158957	710/70-38	189

The chain is made of quality boron, titan and manganese alloy, universal chain for heavy vehicle, loader, grader, skidder and tractor.
Square-link & diamond-mesh chain provides good traction.
Reversible mesh – both wear surfaces of the chain are used. It is long-life chain.



Loader

Diamond Pattern Alloy Square Link Chain-Link Over Link With Wear-Bar - WB

Stock#	Wire Size(mm)	Fitting Tire Size	Wt/Pr(kg)
WB15-9.5	9.5	14.00-24;15.5-25;17.5L24;16.9-24	146
WB24-9.5	9.5	17.5-25;16.00-20	154
WB27-9.5	9.5	16.00-24;16.00-25;19L-24	161
WB33-9.5	9.5	20.5-25;18.00-25;18.4-30;21L-24	175
WB45-9.5	9.5	23.5-25;21.00-25;20.8-34;25/65-25	207
WB57-9.5	9.5	26.5-25;26.5-29;24.00-25;24.5-32	241
WB15-11	11	14.00-24;15.5-25;17.5L24;16.9-24	189
WB24-11	11	17.5-25;16.00-20	207
WB27-11	11	16.00-24;16.00-25;19L-24	211
WB33-11	11	20.5-25;18.00-25;18.4-30;21L-24	228
WB45-11	11	23.5-25;21.00-25;20.8-34;25/65-25	268
WB57-11	11	26.5-25;26.5-29;24.00-25;24.5-32	304
WB72-11	11	29.5-25;30.5-32	342
WB15-13	13	14.00-24;15.5-25;17.5L24;16.9-24	285
WB24-13	13	17.5-25;16.00-20	312
WB27-13	13	16.00-24;16.00-25;19L-24	317
WB33-13	13	20.5-25;18.00-25;18.4-30;21L-24	324
WB36-13	13	21L-24	494
WB45-13	13	23.5-25;21.00-25;20.8-34;25/65-25	375
WB57-13	13	26.5-25;26.5-29;24.00-25;24.5-32	429
WB72-13	13	29.5-25;30.5-32	457

Three sizes: 9.5mm, 11mm or 13mm square link chain reinforced with extra cross-links and wear-bars.
The length must be adjusted according to the instruction when mounting first time. Use of cutting disc may be necessary.
Diamond-patterned chain made of quality boron steel with wear-resistant, hardened surface.
Extra cross-links and wear-bars good grip and low road noise.
Reversible mesh – both wear surfaces of the chain are used. It is long-life chain.



WBQ

DRQ

Stock#	Wire Size(mm)	Fitting Tire Size	Wt./pair(kg)
2612	10	13.00-24, 13.00-25, 14.00-20, 14.00-21, 15.5-25, 14.75/80-20, 44/18.00-20, 445/65-19.5, 495/55-22.5, 400/70-20	59
2615	10	17.5L-24, 14.00-24, 14.00-25, 395/80-20, 385/95-24	63
2624	11	17.5-25, 16.00-20, 16.00-21, 420/70-24	74
2627	11	19.5L-24, 16.00-24, 16.00-25, 17.5/65-20	85.5
2633	11	20.5-25, 525/80-25	92
2636	11	18.00-25, 18.00-26, 21L-24, 555/70-25, 550/65-25	98
2645	13	23.5-25, 25.5-25, 625/70-20	163.5
2648	13	21.00-24, 21.00-25, 705/70-25, 650/65-25	175
2657	13	26.5-25, 750/65-25, 755/70-25, 800/65-32, 710/70-38	205
2672	13	29.5-25	230
2675	13	29.5-29	244
2612-2	10	13.00-24, 13.00-25, 14.00-20, 14.00-21, 15.5-25, 14.75/80-20, 44/18.00-20, 445/65-19.5, 495/55-22.5, 400/70-20	96
2615-2	10	17.5L-24, 14.00-24, 14.00-25, 395/80-20, 385/95-24	104.5
2624-2	11	17.5-25, 16.00-20, 16.00-21, 420/70-24	127.5
2627-2	11	19.5L-24, 16.00-24, 16.00-25, 17.5/65-20	146
2633-2	11	20.5-25, 525/80-25	160.5
2636-2	11	18.00-25, 18.00-26, 21L-24, 555/70-25, 550/65-25	172
2645-2	13	23.5-25, 25.5-25, 625/70-20	290
2648-2	13	21.00-24, 21.00-25, 705/70-25, 650/65-25	310
2657-2	13	26.5-25, 750/65-25, 755/70-25, 800/65-32, 710/70-38	366
2672-2	13	29.5-25	416
2675-2	13	29.5-29	441

Regular Twist Link, 10mm, 11.5mm & 13mm cross chains, Case hardened, 4-link & 2-link spacing.
For plows, graders, forklifts, scrapers, loaders etc.
2600V is available with V-Bar for extra traction in harsher conditions.



2600'S 2-link spacing

2600'S 4-link spacing



Stock#	Wire Size(mm)	Fitting Tire Size	Wt./pair(kg)
6512	10	13.00-24, 13.00-25, 14.00-20, 14.00-21, 15.5-25, 14.75/80-20, 44/18.00-20, 445/65-19.5, 495/55-22.5, 400/70-20	65
6515	10	17.5L-24, 14.00-24, 14.00-25, 395/80-20, 385/95-24	75
6524	11	17.5-25, 16.00-20, 16.00-21, 420/70-24	97.5
6527	11	19.5L-24, 16.00-24, 16.00-25, 17.5/65-20	112.5
6533	11	20.5-25, 525/80-25	111
6536	11	18.00-25, 18.00-26, 21L-24, 555/70-25, 550/65-25	120
6545	13.5	23.5-25, 25.5-25, 625/70-20	168
6548	13.5	21.00-24, 21.00-25, 705/70-25, 650/65-25	179
6557	13.5	26.5-25, 750/65-25 755/70-25, 800/65-32, 710/70-38	186
6572	13.5	29.5-25	210
6575	13.5	29.5-29	210
6512-2	10	13.00-24, 13.00-25, 14.00-20, 14.00-21, 15.5-25, 14.75/80-20, 44/18.00-20, 445/65-19.5, 495/55-22.5, 400/70-20	115
6515-2	10	17.5L-24, 14.00-24, 14.00-25, 395/80-20, 385/95-24	124
6524-2	11	17.5-25, 16.00-20, 16.00-21, 420/70-24	164.5
6527-2	11	19.5L-24, 16.00-24, 16.00-25, 17.5/65-20	198
6533-2	11	20.5-25, 525/80-25	188
6536-2	11	18.00-25, 18.00-26, 21L-24, 555/70-25, 550/65-25	202
6545-2	13.5	23.5-25, 25.5-25, 625/70-20	328
6548-2	13.5	21.00-24, 21.00-25, 705/70-25, 650/65-25	350
6557-2	13.5	26.5-25, 750/65-25 755/70-25, 800/65-32, 710/70-38	361
6572-2	13.5	29.5-25	408
6575-2	13.5	29.5-29	408

6500's Square Link Alloy, 10mm, 11.5mm & 13mm alloy square link cross chains. Quality Boron alloy for durability. Square edge links dig into driving surface. The chains are reversible and can be run on both sides. 6500-2 is 2-link spacing for better traction. For plows, graders, forklifts, scrapers, loaders etc.



6500'S



2900SHP



Stock#	Wire Size(mm)	Fitting Tire Size	Wt./pair(kg)
2912	10	13.00-24, 13.00-25, 14.00-20, 14.00-21, 15.5-25, 14.75/80-20, 44/18.00-20, 445/65-19.5, 495/55-22.5, 400/70-20	69
2915	10	17.5L-24, 14.00-24, 14.00-25, 395/80-20, 385/95-24	74
2924	11	17.5-25, 16.00-20, 16.00-21, 420/70-24	102
2927	11	19.5L-24, 16.00-24, 16.00-25, 17.5/65-20	117
2933	11	20.5-25, 525/80-25	140
2936	11	18.00-25, 18.00-26, 21L-24, 555/70-25, 550/65-25	151
2945	13.5	23.5-25, 25.5-25, 625/70-20	181
2948	13.5	21.00-24, 21.00-25, 705/70-25, 650/65-25	197
2957	13.5	26.5-25, 750/65-25 755/70-25, 800/65-32, 710/70-38	231
2972	13.5	29.5-25	264
2975	13.5	29.5-29	264
2912-2	10	13.00-24, 13.00-25, 14.00-20, 14.00-21, 15.5-25, 14.75/80-20, 44/18.00-20, 445/65-19.5, 495/55-22.5, 400/70-20	117
2915-2	10	17.5L-24, 14.00-24, 14.00-25, 395/80-20, 385/95-24	125
2924-2	11	17.5-25, 16.00-20, 16.00-21, 420/70-24	182
2927-2	11	19.5L-24, 16.00-24, 16.00-25, 17.5/65-20	210
2933-2	11	20.5-25, 525/80-25	250
2936-2	11	18.00-25, 18.00-26, 21L-24, 555/70-25, 550/65-25	270
2945-2	13.5	23.5-25, 25.5-25, 625/70-20	320
2948-2	13.5	21.00-24, 21.00-25, 705/70-25, 650/65-25	340
2957-2	13.5	26.5-25, 750/65-25 755/70-25, 800/65-32, 710/70-38	411
2972-2	13.5	29.5-25	441
2975-2	13.5	29.5-29	441

Studded Alloy, made of quality boron, titan and manganese alloy. 10mm, 11.5mm & 13mm hardened alloy cross chains for extra long life & excellent traction. For plows, graders, forklifts, scrapers, loaders etc. 2900-2 is 2-link spacing for better traction in harshest condition.

Stock#	Fitting Tire Size	Wt./pair(kg)		
		10mm	11mm	13mm
2912SHP-10	13.00-24, 13.00-25, 14.00-20, 14.00-21, 15.5-25, 14.75/80-20, 44/18.00-20, 445/65-19.5, 495/55-22.5, 400/70-20	112		
2915SHP-10	17.5L-24, 14.00-24, 14.00-25, 395/80-20, 385/95-24	119		
2924SHP-10	17.5-25, 16.00-20, 16.00-21, 420/70-24	131		
2927SHP-10	19.5L-24, 16.00-24, 16.00-25, 17.5/65-20	134		
2933SHP-11	20.5-25, 525/80-25		170	
2936SHP-11	18.00-25, 18.00-26, 21L-24, 555/70-25, 550/65-25		180	
2945SHP-11	23.5-25, 25.5-25, 625/70-20		188	
2948SHP-11	21.00-24, 21.00-25, 705/70-25, 650/65-25		199	
2957SHP-13	26.5-25, 750/65-25 755/70-25, 800/65-32, 710/70-38			289
2972SHP-13	29.5-25			311
2975SHP-13	29.5-29			332

Studded Alloy, made of quality boron, titan and manganese alloy. 10mm, 11.5mm & 13mm hardened alloy cross chains for extra long life & excellent traction. For plows, graders, forklifts, scrapers, loaders etc. Square pattern provides maximum life with excellent traction in harsh ground condition.



GE-tractor

Studded Grip Monster Tractor Chains-GE

Stock#	Wire Size(mm)	Fitting Tire Size	Wt/Pr(kg)
GE156055	9.5	12.4-24	85
GE156057	9.5	12.4-28	91
GE156058	9.5	12.4-32	103
GE156059	9.5	12.4-36	111
GE156060	9.5	12.4-38	121
GE156082	9.5	13.6-28	99
GE156084	9.5	13.6-38	121
GE156102	9.5	14.00-24	104
GE156109	9.5	14.9-24	94
GE156110	9.5	14.9-28	100
GE156132	9.5	15.5-18	74
GE156596	9.5	360/70-20	75
GE156597	9.5	360/70-24	82
GE156609	9.5	380/70-24	87
GE156637	9.5	400/50-15	63
GE156640	9.5	400/60-15.5	68

Stock#	Wire Size(mm)	Fitting Tire Size	Wt/Pr(kg)
GE158266	13	20.8-38	263
GE158350	13	23.5-25	236
GE158370	13	24.5-32	264
GE158430	13	26.5-25	272
GE158794	13	520/70-38	250
GE158815	13	550/45-22.5	167
GE158824	13	580/70-42	276
GE158849	13	600/45-22.5	179
GE158850	13	600/50-22.5	180
GE158852	13	600/55-26.5	203
GE158853	13	600/60-22.5	192
GE158862	13	600/60-30.5	216
GE158898	13	625/70-25	232
GE158913	13	650/65-42	289
GE158918	13	650/85-38	289
GE158942	13	700/55-34	244
GE158946	13	700/65-38	287
GE158952	13	710/40-22.5	183
GE158951	13	710/45-26.5	210
GE158953	13	710/50-30.5	223
GE158957	13	710/70-38	289
GE158898	13	710/70-42	302
GE158969	13	750/50-30.5	240
GE158959	13	750/55-26.5	247

The Grip Extreme chain is available in 9.5mm, 11mm & 13mm. It is a universal tractor chain for servere application. Made of Boron, Titan and Manganese alloy, perfect fit, reliable grip, long life. All cross chain and side are perfectly hardened.



Stock#	Wire Size(mm)	Fitting Tire Size	Wt/Pr(kg)
GE156112	11	14.9-38	178
GE156157	11	16.9-24	159
GE156158	11	16.9-26	160
GE156159	11	16.9-28	168
GE156160	11	16.9-30	170
GE156162	11	16.9-38	197
GE156212	11	18-19.5	132
GE156208	11	18.4-38	208
GE156261	11	20.5-25	173
GE156669	11	420/70-24	150
GE156686	11	420/85-34	188
GE156720	11	475/65-20	134
GE156724	11	480/65-24	144
GE156726	11	480/65-28	153
GE156733	11	480/70-30	177
GE156770	11	500/60-15.5	122
GE156771	11	500/60-22.5	141
GE156799	11	520/85-38	218
GE156805	11	540/65-28	163

NETLINK FORGED FORESTRY CHAIN

Single Extreme

Tier Sizes	Part#	Material Size	Weight
30.5x32	NFTFFPE305-22	22mm(7/8")	1267 kg(2793 lbs)
35.5x32	NFTFFPE355-22	22mm(7/8")	1399 kg(3084 lbs)
73x44x32	NFQFFPE730-22	22mm(7/8")	1690 kg(3726 lbs)

Triple stud

Tier Sizes	Part#	Material Size	Weight
30.5x32	NLTFFPE305-22	22mm(7/8")	1352 kg(2981 lbs)
35.5x32	NLTFFPE355-22	22mm(7/8")	1449 kg(3194 lbs)
73x44x32	NLQFFPE730-22	22mm(7/8")	1779 kg(3922 lbs)



TRIPLE STUD



DOUBLE STUD



SINGLE STUD



NLTFFP



Tire Protection Chains

Size	Connecting Ring x Diameter	Link height x width mm	Mesh opening	Minimum Clearance
20.5-25	16x50	48x35	112	80
23.5-25	16x50	48x35	112	80
1800R25	18x64	60x46	140	90
26.5-25	20x64	60x46	140	90
29.5-25	20x64	60x46	140	90
29.5-29	20x64	60x46	140	90
35/65-33	20x64	60x46	140	90
27.00-49	22x74	74x46	165	120
37.00-57	22x74	74x46	165	120
40.00-57	22x74	74x46	165	120
45/65-45	22x74	74x46	165	120
55/80-63	22x74	74x46	165	120
59/80-63	22x74	74x46	165	120
30.00-51	22x74	74x46	165	120
33.00-51	22x74	74x46	165	120
36.00-51	22x74	74x46	165	120
58/85-57	22x74	74x46	165	120
53.5/80-57	22x74	74x46	165	120



TPC


NLTMT

TPC
Compact Tire Protection Chains
The square net provides best tire protection under most severe condition.
Tire service life is multiplied by use of the chain.

NLTMT
Each square of the chain net is made of 8 forging links & 8 rings.
It is ideal for vehicles that requires extra traction as well as protection of tire.

Military Chain

This chain won the bid of Canadian Armed Forces Truck in 2016, 2017 and 2018. For details, please contact us

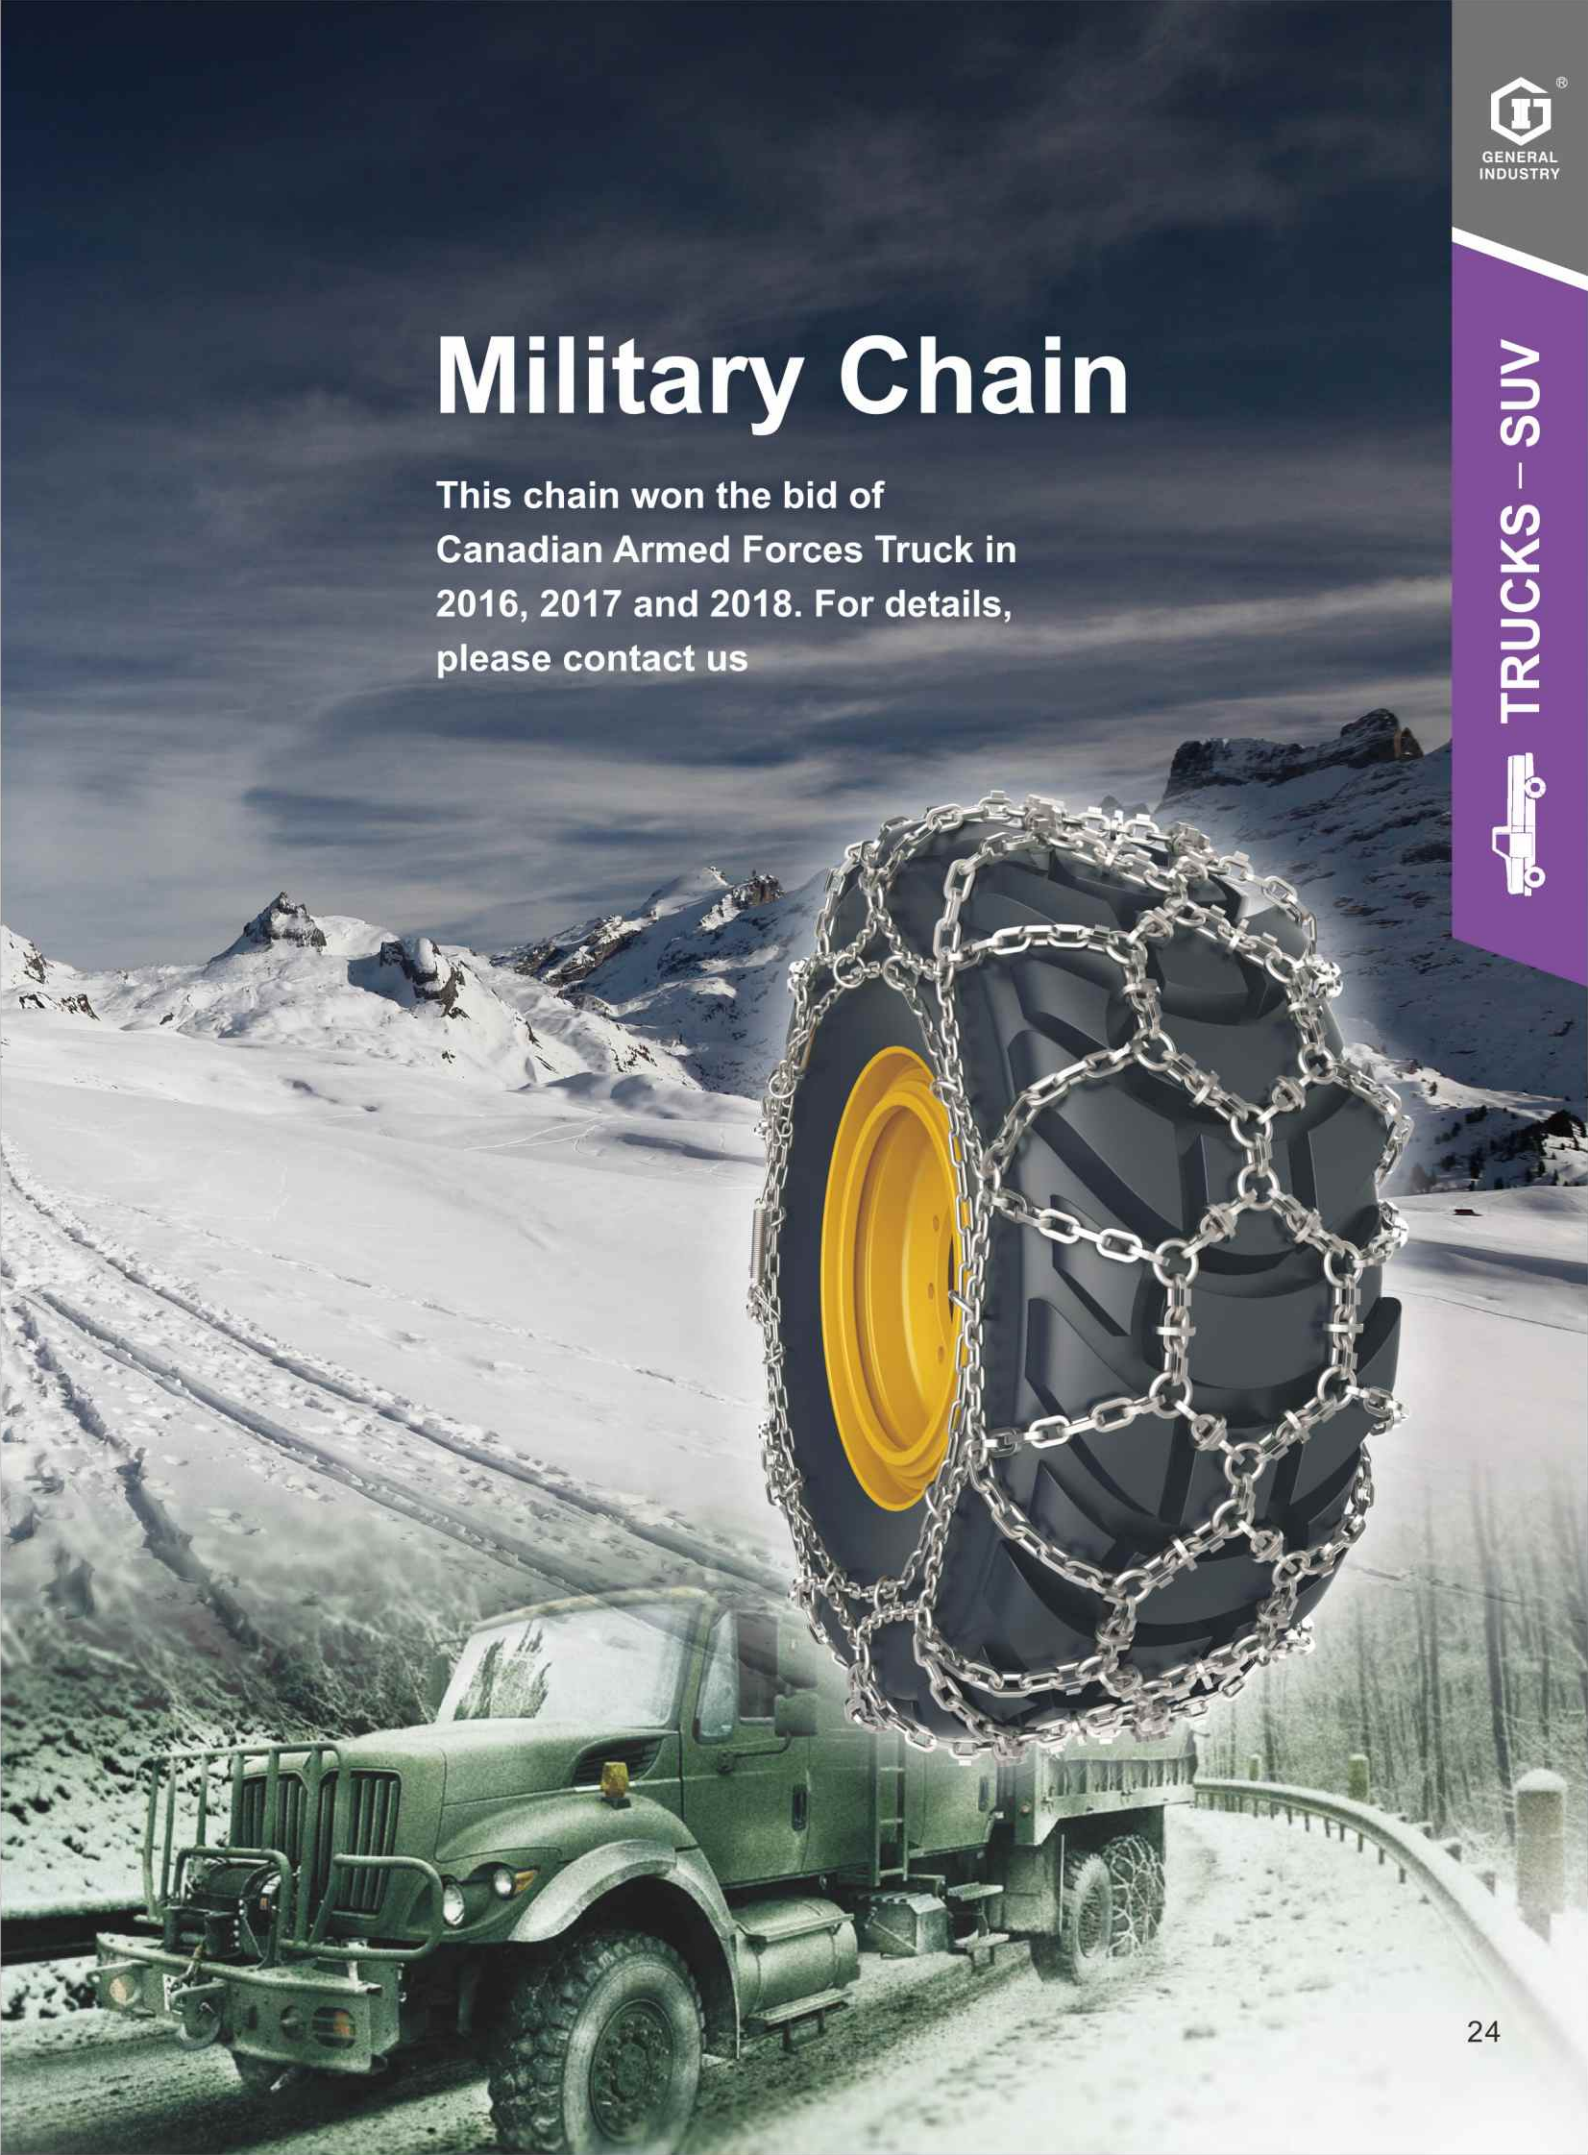

Net-Truck

D5.5 Truck chains-Net

Stock#	Fitting Tire Size
270	825-15, 825-16, 9.5-17.5, 250/80-18, 235/75-17.5, 700-18, 750-18, 8-19.5, 650-20, 700-20
275	245/70-19.5, 265/70-19.5
280	825-17, 10-17.5, 9-19.5, 9.5-19.5, 750-20, 800-20, 225/90-20, 8-22.5
290	11.00-16, 825-20, 9-22.5, 8.3-24, 255/70-22.5
295	305/70-19.5, 295/60-22.5, 285/60-22.5
300	900-20, 10-22.5, 11/70-22.5, 9.5-24, 275/70-22.5, 295/70-22.5, 305/60-22.5, 315/60-22.85
310	1000-20, 11-22.5, 12.4-20, 12/80-20, 275/80-22.5/ 305/70-22.5, 315/70-22.5
320	1100-20, 315/80-22.5, 315/75-22.5, 305/75-24.5, 315/75-24.5
330	1200-20, 1100-22, 13-22.5, 1000-24
360	12.5-18, 12.5/80-18, 335/80-18, 320/70-20
370	13.6-16, 12.5-20, 11.2-24, 13/80-20, 12-22.5, 12/80-22.5, 335/80-20, 295/80-22.5, 13/75-22.5


D7 Truck chains

Stock#	Fitting Tire Size
380	1300-20 , 14.75/80-20
390	1400-20
400	1200-24, 14/80-24
520	14.5-20, 15-22.5, 14/80-20, 365/80-20, 375/75-20, 385/65-22.5, 320/70-24
525	16.5-22.5, 425/65-22.5
530	18-22.5, 445/65-22.5




Net-Truck

S-truck

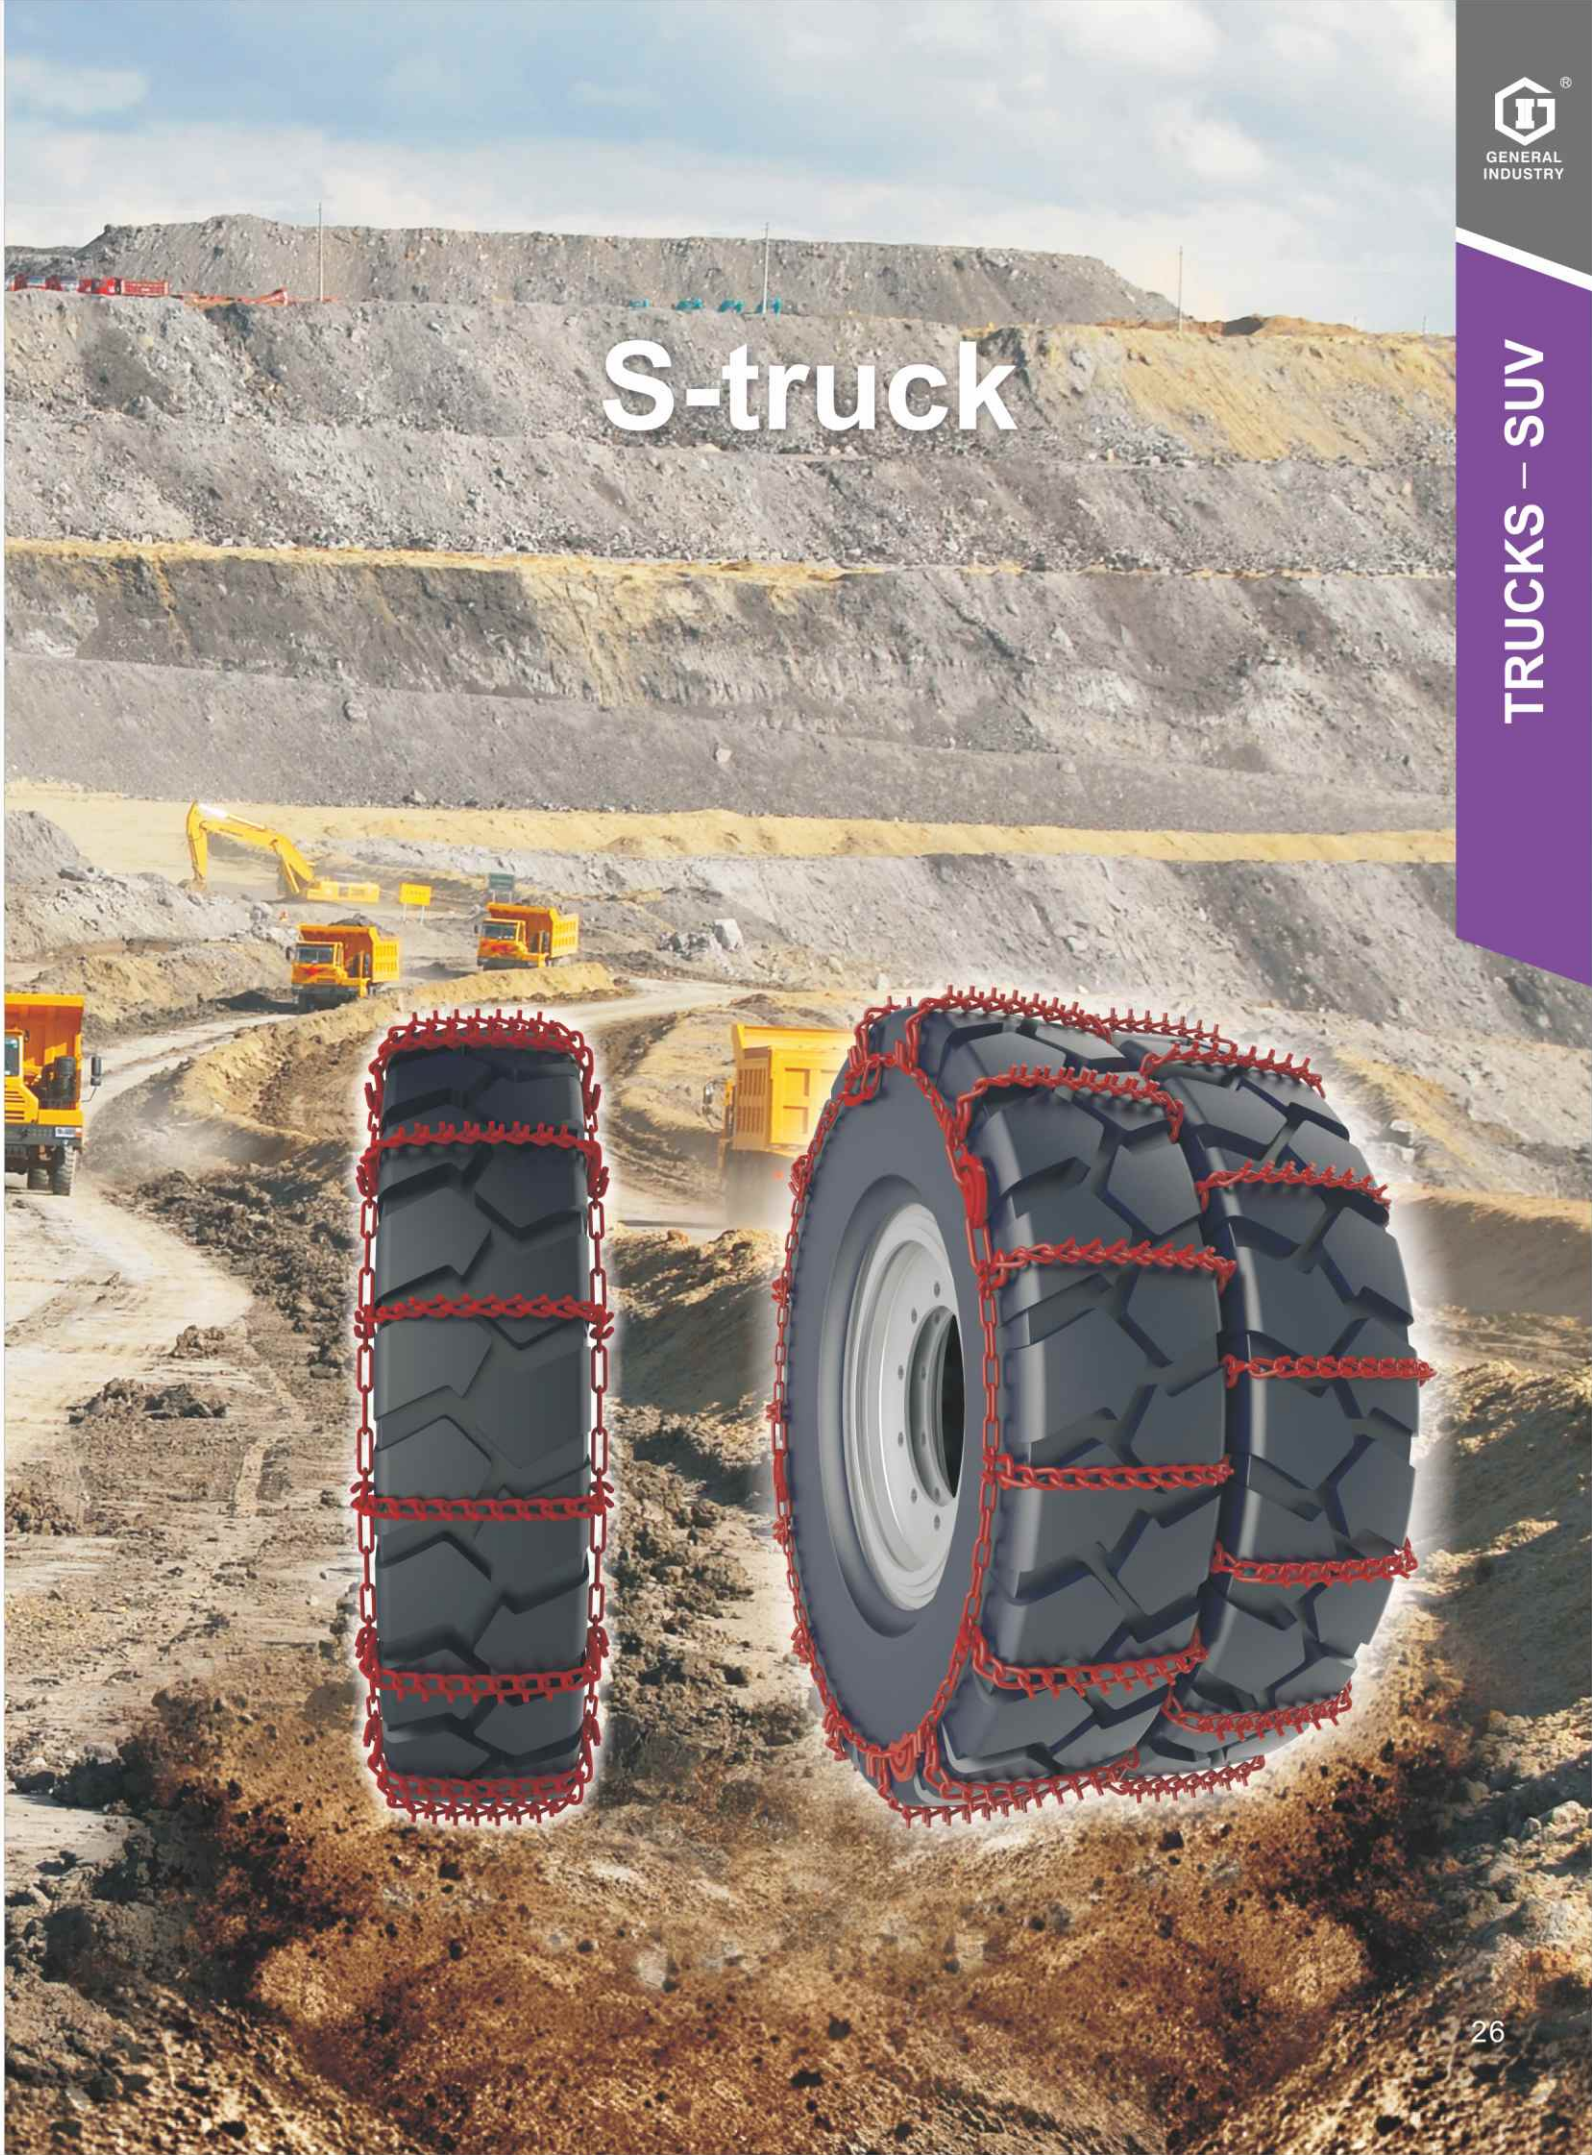

S-Truck



Stock#	Fitting Tire Size	Wt./pair(kg)
S295	305/70-16; 285/75-16; 275/85-16; 285/70-17; 285/75-17; 275/80-17; 285/60-18; 285/65-18; 285/70-18; 275/55-20; 265/60-20; 275/60-20; 33X12.50-15; 33X12.0-16.5; 12X16.5	22
S296	35x12.50-15; 295/75R16; 315/70R16; 315/70R17; 35x12.50-17; 285/75R18;	24.2
S315	265/75-15; 7.00-15; 31X10.5-15; 235/70-16; 225/75-16; 215/85-16; 225/85-16; 235/60-17; 255/60-17; 225/75-17; 265/55-17; 215/75-17.5	20
S320	255/70-16; 265/70-16; 265/75-16; 235/85-16; 265/70-17; 235/80-17; 225/70-19.5	22
S322	255/85R16; 275/70R17; 265/65R18; 265/70R18; 275/75R18; 245/70R19.5	24
S332	10.5-18; 9-22.5; 265/70-19.5; 235/80-22.5; 245/75-22.5; 255/70-22.5;	23.2
S342	9.00-20; 10-22.5; 255/80-22.5; 265/75-22.5; 275/70-22.5	26.9
S343	10.00-20; 11R22.5; 285/75R22.5; 295/75R22.5; 275/80R22.5	29
S344	10.00-22; 11R24.5; 285/75R24.5; 295/75R24.5; 275/80R24.5	30.5
S295QC	305/70-16; 285/75-16; 275/85-16; 285/70-17; 285/75-17; 275/80-17; 285/60-18; 285/65-18; 285/70-18; 275/55-20; 265/60-20; 275/60-20; 33X12.50-15; 33X12.0-16.5; 12X16	22.8
S296QC	35x12.50-15; 295/75R16; 315/70R16; 315/70R17; 35x12.50-17; 285/75R18	25
S315QC	265/75-15; 7.00-15; 31X10.5-15; 235/70-16; 225/75-16; 215/85-16; 225/85-16; 235/60-17; 255/60-17; 225/75-17; 265/55-17; 215/75-17.5	20.8
S320QC	255/70-16; 265/70-16; 265/75-16; 235/85-16; 265/70-17; 235/80-17; 225/70-19.5	22.8
S322QC	255/85R16; 275/70R17; 265/65R18; 265/70R18; 275/75R18; 245/70R19.5	24.8
S332QC	10.5-18; 9-22.5; 265/70-19.5; 235/80-22.5; 245/75-22.5; 255/70-22.5	24
S342QC	9.00-20; 10-22.5; 255/80-22.5; 265/75-22.5; 275/70-22.5	27.7
S343QC	10.00-20; 11R22.5; 285/75R22.5; 295/75R22.5; 275/80R22.5	29.9
S344QC	10.00-22; 11R24.5; 285/75R24.5; 295/75R24.5; 275/80R24.5	31.4
S715	265/75-15; 7.00-15; 31X10.5-15; 235/70-16; 225/75-16; 215/85-16; 225/85-16; 235/60-17; 255/60-17; 225/75-17; 265/55-17; 215/75-17.5	36.2
S720	255/70-16; 265/70-16; 265/75-16; 235/85-16; 265/70-17; 235/80-17; 225/70-19.5	39.3
S722	255/85R16; 275/70R17; 265/65R18; 265/70R18; 275/75R18; 245/70R19.5	43
S732	37X12.5-15; 37X14.5-15; 315/75-16; 9.00-16; 10.5-18; 265/70R19.5; 355/60-20; 9-22.5; 235/80-22.5; 245/75-22.5; 255/70-22.5	44.8
S742	9.00-20; 10-22.5; 265/75-22.5; 255/80-22.5; 275/70-22.5	48.4
S743	10.00-20; 11R22.5; 285/75R22.5; 295/75R22.5; 275/80R22.5	52.8
S744	10.00-22; 11R24.5; 285/75R24.5; 295/75R24.5; 275/80R24.5	56
S715QC	265/75-15; 7.00-15; 31X10.5-15; 235/70-16; 225/75-16; 215/85-16; 225/85-16; 235/60-17; 255/60-17; 225/75-17; 265/55-17; 215/75-17.5	38.4
S720QC	255/70-16; 265/70-16; 265/75-16; 235/85-16; 265/70-17; 235/80-17; 225/70-19.5	41.5
S722QC	255/85R16; 275/70R17; 265/65R18; 265/70R18; 275/75R18; 245/70R19.5	45.4
S732QC	37X12.5-15; 37X14.5-15; 315/75-16; 9.00-16; 10.5-18; 265/70R19.5; 355/60-20; 9-22.5; 235/80-22.5; 245/75-22.5; 255/70-22.5	47
S742QC	9.00-20; 10-22.5; 265/75-22.5; 255/80-22.5; 275/70-22.5	50.6
S743QC	10.00-20; 11R22.5; 285/75R22.5; 295/75R22.5; 275/80R22.5	53.7
S744QC	10.00-22; 11R24.5; 285/75R24.5; 295/75R24.5; 275/80R24.5	57.8

* The above chain has 8.8 mm hardened hooks, 7 mm hardened side chain and 7 mm specially hardened cross chains with oversized studs.



S344



S744

Stock#	Fitting Tire Size	Wt./pair(kg)
S295-2	305/70-16; 285/75-16; 275/85-16; 285/70-17; 285/75-17; 275/80-17; 285/60-18; 285/65-18; 285/70-18; 275/55-20; 265/60-20; 275/60-20; 33X12.50-15; 33X12.0-16.5; 12X16.5	35.2
S296-2	35x12.50-15; 295/75R16; 315/70R16; 315/70R17; 35x12.50-17; 285/75R18;	38.9
S315-2	265/75-15; 7.00-15; 31X10.5-15; 235/70-16; 225/75-16; 215/85-16; 225/85-16; 235/60-17; 255/60-17; 225/75-17; 265/55-17; 215/75-17.5	31.2
S320-2	255/70-16; 265/70-16; 265/75-16; 235/85-16; 265/70-17; 235/80-17; 225/70-19.5	34.4
S322-2	255/85R16; 275/70R17; 265/65R18; 265/70R18; 275/75R18; 245/70R19.5	36.7
S332-2	10.5-18; 9-22.5; 265/70-19.5; 235/80-22.5; 245/75-22.5; 255/70-22.5;	38.4
S342-2	9.00-20; 10-22.5; 255/80-22.5; 265/75-22.5; 275/70-22.5	42.6
S343-2	10.00-20; 11R22.5; 285/75R22.5; 295/75R22.5; 275/80R22.5	46
S344-2	10.00-22; 11R24.5; 285/75R24.5; 295/75R24.5; 275/80R24.5	49.4



2LINK - SPACE



Stock#	Fitting Tire Size	Wt./pair(kg)
S298	305/85–16; 35X14–16.5; 36X14–16.5; 355/45–17; 325/65–18; 275/45–20	30
S298-2	305/85–16; 35X14–16.5; 36X14–16.5; 355/45–17; 325/65–18; 275/45–20	49.5
S343HD	10.00–20; 11R22.5; 285/75R22.5; 295/75R22.5; 275/80R22.5	34.5
S343HD-2	10.00–20; 11R22.5; 285/75R22.5; 295/75R22.5; 275/80R22.5	57
S344HD	10.00–20; 11R22.5; 285/75R22.5; 295/75R22.5; 275/80R22.5	37
S344HD-2	10.00–20; 11R22.5; 285/75R22.5; 295/75R22.5; 275/80R22.5	61.2
S355	12R22.5; 11.00X20; 315/80–22.5	39.8
S355-2	12R22.5; 11.00X20; 315/80–22.5	71.3
S356	12–24.5; 365/80–22.5; 12.00–20; 11.00X22	42.6
S356-2	12–24.5; 365/80–22.5; 12.00–20; 11.00X22	71.5
S372	385/65R22.5; 445/50R22.5; 445/65R19.5	41.2
S372-2	385/65R22.5; 445/50R22.5; 445/65R19.5	69.8
S377	425/65R22.5	44
S377-2	425/65R22.5	75.2
S379	12.00X24	43.1
S379-2	12.00X24	85
S382	14.00–20; 445/65R22.5	46.8
S382-2	14.00–20; 445/65R22.5	80.8
S298QC	305/85–16; 35X14–16.5; 36X14–16.5; 355/45–17; 325/65–18; 275/45–20	31
S343HDQC	10.00–20; 11R22.5; 285/75R22.5; 295/75R22.5; 275/80R22.5	35.5
S344HDQC	10.00–22; 11R24.5; 285/75R24.5; 295/75R24.5; 275/80R24.5	38
S355QC	12R22.5; 11.00X20; 315/80–22.5	40.8
S356QC	12–24.5; 365/80–22.5; 12.00–20; 11.00X22	43.5
S372QC	385/65R22.5; 445/50R22.5; 445/65R19.5	42.7
S377QC	425/65R22.5	44.8
S379QC	12.00X24	44
S382QC	14.00–20; 445/65R22.5	46
S743HDQC	10.00–20; 11R22.5; 285/75R22.5; 295/75R22.5; 275/80R22.5	65
S744HDQC	10.00–22; 11R24.5; 285/75R24.5; 295/75R24.5; 275/80R24.5	69.6
S755QC	12R22.5; 11.00X20; 315/80–22.5	75
S756QC	12–24.5; 365/80R22.5; 12.00–20; 11.00–22	80.6
S772QC	385/65R22.5; 445/50R22.5; 445/65R19.5	78.9
S777QC	425/65R22.5	83.5
S779QC	12.00X24	83.6
S782QC	14.00X20; 445/65R22.5	89

* The above chain has 10 mm hardened hooks, 8 mm hardened side chain and 8 mm specially hardened cross chains with oversized studs.



Stock#	Fitting Tire Size	Wt./pair(kg)
S322LW	255/85R16; 275/70R17; 265/65R18; 265/70R18; 275/75R18; 245/70R19.5	20.2
S343LW	10.00–20; 11R22.5; 285/75R22.5; 295/75R22.5; 275/80R22.5	22
S344LW	10.00–22; 11R24.5; 285/75R24.5; 295/75R24.5; 275/80R24.5	23.7
S355LW	12R22.5; 11.00X20; 315/80–22.5	25.7
S356LW	12–24.5; 365/80–22.5; 12.00–20; 11.00X22	27.5
S372LW	385/65R22.5; 445/50R22.5; 445/65R19.5	26.7
S322LWQC	255/85R16; 275/70R17; 265/65R18; 265/70R18; 275/75R18; 245/70R19.5	20.9
S343LWQC	10.00–20; 11R22.5; 285/75R22.5; 295/75R22.5; 275/80R22.5	22.7
S344LWQC	10.00–22; 11R24.5; 285/75R24.5; 295/75R24.5; 275/80R24.5	24
S355LWQC	12R22.5; 11.00X20; 315/80–22.5	26.5
S356LWQC	12–24.5; 365/80–22.5; 12.00–20; 11.00X22	28.3
S372LWQC	385/65R22.5; 445/50R22.5; 445/65R19.5	27.5
S343LW-4	10.00x20; 11R22.5; 285/75R22.5; 295/75R22.5; 275/80R22.5	28.7
S344LW-4	10.00–22; 11R24.5; 285/75R24.5; 295/75R24.5; 275/80R24.5	31.7
S355LW-4	12R22.5; 11.00X20; 315/80–22.5	32.5
S356LW-4	12–24.5; 365/80–22.5; 12.00–20; 11.00X22	34.3
S372LW-4	385/65R22.5; 445/50R22.5; 445/65R19.5	36.7
S743LW	10.00–20; 11R22.5; 285/75R22.5; 295/75R22.5; 275/80R22.5	42.3
S744LW	10.00–22; 11R24.5; 285/75R24.5; 295/75R24.5; 275/80R24.5	43.8
S744HYC	10.00–22; 11R24.5; 285/75R24.5; 295/75R24.5; 275/80R24.5	69.6
S743LWQC	10.00–20; 11R22.5; 285/75R22.5; 295/75R22.5; 275/80R22.5	43.9
S744LWQC	10.00–22; 11R24.5; 285/75R24.5; 295/75R24.5; 275/80R24.5	45.5

* These are light-weighted chains 8 mm hardened hooks, 6 mm hardened side chain and 7 mm specially hardened cross chains with oversized studs.





Stock#	Fitting Tire Size	Wt./pair(kg)
S342-10	10–22.5; 255/80–22.5; 265/75–22.5; 275/70–22.5; 285/70–19.5; 305/70–19.5; 37X12.50–16.5; 385/65–20; 38X12.50–15; 9.00–20	39.3
S343-10	10.00–20; 11R22.5; 285/75R22.5; 295/75R22.5; 275/80R22.5	42.7
S344-10	10.00–22; 11R24.5; 285/75R24.5; 295/75R24.5; 275/80R24.5	46.1
S372-10	385/65R22.5; 445/50R22.5; 445/65R19.5	52.3
S379-10	12.00X24	56
S382-10	1400X20; 445/65R22.5	63.5
S387-10	1400X24; 1400X25	72.4
S342QC-10	10–22.5; 255/80–22.5; 265/75–22.5; 275/70–22.5; 285/70–19.5; 305/70–19.5; 37X12.50–16.5; 385/65–20; 38X12.50–15; 9.00–20	40.2
S343QC-10	10.00–20; 11R22.5; 285/75R22.5; 295/75R22.5; 275/80R22.5	43.6
S344QC-10	10.00–22; 11R24.5; 285/75R24.5; 295/75R24.5; 275/80R24.5	47
S372QC-10	385/65R22.5; 445/50R22.5; 445/65R19.5	53.2
S379QC-10	12.00X24	56.9
S382QC-10	14.00–20; 445/65R22.5	64.4
S387QC-10	1400X24; 1400X25	73.3
S742-10	10–22.5; 255/80–22.5; 265/75–22.5; 275/70–22.5; 285/70–19.5; 305/70–19.5; 37X12.50–16.5; 385/65–20; 38X12.50–15; 9.00–20	73.8
S743-10	10.00–20; 11R22.5; 285/75R22.5; 295/75R22.5; 275/80R22.5	80
S744-10	10.00–22; 11R24.5; 285/75R24.5; 295/75R24.5; 275/80R24.5	86.5
S779-10	12.00X24	106.3
S782-10	14.00X20	120.9
S787-10	14.00X24	137.5
S742QC-10	10–22.5; 255/80–22.5; 265/75–22.5; 275/70–22.5; 285/70–19.5; 305/70–19.5; 37X12.50–16.5; 385/65–20; 38X12.50–15; 9.00–20	75.6
S743QC-10	10.00–20; 11R22.5; 285/75R22.5; 295/75R22.5; 275/80R22.5	81.8
S744QC-10	10.00–22; 11R24.5; 285/75R24.5; 295/75R24.5; 275/80R24.5	88.3
S779QC-10	12.00X24	108
S782QC-10	14.00X20	122.7
S787QC-10	14.00X24	139.3

* These are heavy-duty chains 11 mm hardened hooks, 8 mm hardened side chain and 10 mm specially hardened cross chains with oversized studs.



8mm-Z chain

Stock#	Fitting Tire Size	Wt./pair(kg)
136007	10.00–20	47
136026	11.00–20	49.2
136140	15–22.5	58.6
136545	315/80–22.5	60.3
136615	385/55–22.5	53.5

* The above chains are with 8mm cross chain+10mm cross hooks+8mm side chains



Net Studded Chain

Stock#	Fitting Tire Size	Wt./pair(kg)
S310	10.00–20	45
S320	11.00–20	45.5
	12.00–25	45.5
S330	315/80–22.5	48
	12.00–20	48
S390	14.00–20	57
S828	425/85–21	59.5
S850	14.00–24	64

* The above chains are with 8mm cross chain+10mm cross hooks+8mm side chainsCam-style tensioning system is available



Fabric Emergency Chian

Cable Chain

Fabric Truck Chains

Stock#	Fitting Tire Size
A	215/75-17.5
	225/75-17.5
	245/70-17.5
B	235/75-17.5
	245/75-17.5
	265/70-17.5
C	245/70-19.5
D	265/70-19.5
E	285/70-19.5
	265/60-22.5
F	275/70-22.5
	315/70-22.5
	295/75-22.5
	275/80-22.5
G	295/80-22.5
	10.00-20
	11R22.5
I	315/80-22.5
J	11R24.5
K	445/50-22.5

Cable Chain

Stock#	Fitting Tire Size	Wt./pair(kg)
QV729	215/85-16; 225/60-18; 225/75-16; 235/70-16; 245/60-17; 245/75-15; 255/55-17; 275/45-18	5.9
	205/75-17.5; 215/70-17.5; 215/75-16; 215/75-17.5; 215/80-16; 225/55-18; 225/55-19; 225/70-17; 225/75-17; 235/50-19	
	235/55-19; 235/60-17; 235/60-18; 235/65-16; 235/65-17; 235/70-15; 235/75-15; 245/45-20; 245/50-19; 245/55-18	
	245/65-16; 245/70-15; 255/45-20; 265/40-20; 265/45-18; 265/60-16; 275/60-15; 29X9.50-15; 8.75-16.5; 215/70-17	
	235/30-22; 245/30-22; 255/40-20; 275/30-20; 275/35-20; 275/40-19; 285/30-19; 285/30-20; 295/30-20; 295/35-18	
QV735	10-16.5LT; 215/80-17; 225/65-18; 235/75-16; 245/70-17; 255/55-18; 265/60-17; 265/70-15	5.9
	275/40-20; 225/55-20; 225/60-19; 225/70-18; 225/75-17.5; 225/85-16; 235/55-20; 235/65-18; 235/70-17; 235/70-17.5; 235/75-17	
	245/40-22; 245/50-20; 245/55-19; 245/60-18; 245/65-17; 245/70-16; 245/85-15; 255/50-19; 255/50-20; 255/55-19; 255/60-17	
	255/65-16; 255/65-17; 255/70-15; 255/70-16; 265/35-22; 265/45-20; 265/45-21; 265/50-19; 265/55-17; 265/55-18; 265/65-16	
	265/790-540A; 275/45-18; 275/50-17; 275/50-19; 285/30-21; 285/45-18; 285/45-19; 285/50-18; 285/60-16; 295/30-22	
	295/35-21; 295/40-20; 295/45-18; 30X9.50-15; 9.50-16.5; 255/30-22; 295/30-19	



Qv7



Qv8

- * Good traction
- * Low vibration
- * Long life

Stock#	Fitting Tire Size	Wt./pair(kg)
QV741	235/70-18; 235/80-16; 235/85-16; 245/75-16; 245/75-17; 265/60-18; 265/70-16; 275/60-17	6.4
	245/70-17.5; 225/80-17; 235/70-19.5; 235/75-17.5; 235/85-17; 245/45-22; 245/60-20; 245/75-17.5; 255/35-22	
	255/60-18; 265/40-22; 265/65-17; 265/75-15; 275/45-19; 275/45-20; 275/55-17; 275/55-18; 275/60-16; 275/65-16; 285/40-20	
	285/40-22; 285/45-20; 285/45-21; 295/30-23; 295/65-16; 305/45-20; 31X10.50-15; 31X10.50-16.5; 7.50-16; 32X9.50-15	
QV747	245/70-18; 255/70-18; 265/70-17; 265/75-16; 275/60-18; 275/70-17; 225/70-19.5; 33X10.50-15	6.8
	275/75-15; 215/75-19.5; 225/75-19.5; 225/75-20; 235/80-17; 245/85-16; 255/50-21; 255/55-20; 255/60-19; 255/65-18	
	255/65-19; 255/70-17; 255/75-16; 265/50-20; 265/65-18; 265/80-16; 275/45-22; 275/50-20; 275/55-19; 275/65-17	
	275/70-16; 275/75-16; 285/35-22; 285/55-18; 285/55-19; 285/60-17; 285/65-16; 285/65-17; 285/70-15; 285/75-15	
QV751	295/35-22; 295/40-21; 295/45-20; 305/35-22; 305/55-18; 31X11.50-15; 31X11.50-16.5; 325/60-15; 32X11.50-15; 255/30-24; 8x19.5	6.8
	12-16.5; 245/70-19.5; 245/75-18; 265/70-18; 265/75-17; 275/65-18; 285/70-16; 315/70-16	
	255/75-17; 255/85-16; 265/60-20; 275/55-20; 275/60-20; 285/45-22; 285/50-20; 285/55-20; 285/60-18; 285/75-16; 295/35-24	
	295/50-20; 295/60-18; 295/70-15; 305/40-22; 305/40-23; 305/65-17; 325/50-20; 33X9.50-15; 345/55-17; 275/30-24; 315/35-20	
QV753	275/70-18; 285/70-17; 305/60-18; 305/70-16; 325/60-18; 33X12.50-15; 33X12.50-17	7.3
QV757	265/70-19.5; 275/65-20; 285/40-24; 285/50-22; 285/70-18; 285/75-17; 295/75-16; 305/45-22; 305/35-24	7.7
QV761	285/75-18; 305/70-17; 315/70-17; 315/75-16; 35X12.50-15; 35X12.50-17; 35X12.50-18	8.6
QV818	445/65-22.5	20.4
QV835	8.25-15; 255/70-19.5; 245/70-19.5	15.4
QV837	9.5-17.5; 9.50-16; 9.00-15; 275/70-19.5; 265/75-19.5; 265/70-19.5	15.9
QV841	10-17.5	15.9
QV853	10.00-15; 245/70-22.5; 285/70-19.5; 295/70-19.5; 305/85-16; 325/75-17; 375/60-18	16.3
QV859	235/80-22.5; 245/75-22.5; 245/80-22.5; 255/70-22.5; 255/75-22.5; 285/65-20; 325/80-16; 9-22.5; 8.25-20; 295/75-17.5	16.3
QV865	8.25-22.5; 7.50-22.5; 315/60-22; 265/75-22.5; 255/80-22.5	16.3
QV869	9.00-20; 285/65-22.5; 275/70-22.5; 10-22.5;	16.3
QV877	295/70-22.5; 285/75-22.5; 275/80-24.5; 275/75-22.5; 10.00/90-20	17.2
QV881	10.00-20; 11-22.5; 285/75-24.5; 285/80-22.5; 285/80-24.5; 295/75-22.5; 295/75-24.5; 305/80-22.5; 11.5-22.5; 295/80-22.5; 305/70-22.5; 315/70-22.5	16.8
QV887	10.00-22; 11.00-20; 11.50-20; 11-24.5; 12-22.5; 275/80-22.5; 305/75-24.5; 315/80-22.5; 12.5-22.5; 320/75-24	17.7
QV891	11.00-22; 11.00-24; 12.00-20; 12.5-24.5; 12.75-22.5; 13-22.5; 315/80-22.5M	18.1
QV892	14/80-20; 305/85-22.5; 365/70-22.5; 365/80-20; 385/65-22.5; 400/70-20	18.1
QV896	16.5-22.5; 425/55-22.5; 425/65-22.5; 445/65-19.5	21.3
QV897	445/50-22.5; 445/55-22.5; 455/50-22.5	19.5
QV898	395/85-20; 425/70-22.5	20.9
QV899	12.00-24; 455/55-22.5	20.0



2300LW

Stock#	Fitting Tire Size	Wt./pair(kg)
2314LW	255/85-16; 265/70-18; 275/65-17; 285/75-16; 32X11.50-15; 33X10.50-15; 33X9.50-15; 35X10.50-15	7.3
	235/75-17.5; 245/70-19.5; 275/45-22; 295/65-16; 305/70-19.5; 31X12.50-15; 32X12.50-15; 32X12.50-16.5	
2315LW	215/70-16; 215/70-17.5; 215/75-15; 215/75-16; 225/70-15; 225/75-15; 8.75-16.5	6.4
2317LW	225/55-18; 225/70-16; 225/70-17; 225/75-16; 235/70-15; 235/75-15; 245/60-17; 255/55-17; 225/70-17.5; 225/85-16; 235/60-18; 295/30-19	5.9
2319LW	215/85-16; 225/75-17; 235/65-18; 245/60-18; 255/55-18; 255/70-16; 275/60-15; 275/60-16	6.8
	215/75-17.5; 225/55-19; 225/60-14; 225/65-18; 235/50-19; 235/65-17; 235/70-16; 235/70-17; 235/75-16; 235/80-16; 235/80-17	
	245/45-20; 245/55-19; 245/65-17; 245/70-15; 245/70-16; 255/35-22; 255/45-20; 255/60-17; 255/65-16; 255/65-17; 255/70-15; 265/45-20;	
	265/55-17; 265/60-17; 265/65-16; 265/70-15; 265/75-15; 265/85-16; 275/45-19; 275/50-17; 275/55-16; 275/70-17.5; 275/55-16;	
	275/70-17.5; 305/75-15; 30X9.50-15; 31X9.50-15; 325/60-15; 32X9.50-15; 9.50-16.5; 275/35-20; 275/45-18; 275/55-17; 285/30-19 ;295/30-20; 7.50-16	
2321LW	235/85-16; 245/70-17; 255/55-19; 255/75-16; 265/60-18; 265/75-17; 275/65-16; 275/70-16	6.8
	245/70-17.5; 225/70-19.5; 225/75-17.5; 235/75-17; 235/80-18; 245/50-20; 245/75-15; 245/75-17; 255/50-20; 255/55-20; 255/60-18; 255/60-19; 255/65-18;	
	255/70-17; 265/35-22; 265/40-22; 265/55-16; 265/65-17; 265/70-17; 265/75-16; 275/40-20; 275/45-20; 275/55-18; 275/70-17; 295/40-20; 295/75-16; 315/35-20	
2327LW	12-16.5LT; 255/70-18; 255/75-15; 255/75-17; 265/65-18; 285/55-18; 285/60-17; 285/60-18	7.7
	265/45-22; 265/50-20; 275/55-19; 285/35-22; 285/40-22; 285/70-19.5; 295/45-20; 305/40-22; 305/85-16; 32X11.50-16.5	
2328LW	275/55-20; 285/45-22; 285/50-20; 285/70-17; 305/50-20; 325/40-22	7.7
2329LW	245/75-16; 255/65-15; 265/70-16; 275/60-17; 275/60-18; 285/50-18; 285/70-15; 31X11.50-15	7.3
	205/75-17.5; 245/85-15; 255/50-19; 265/50-19; 265/70-19.5; 285/45-19; 295/45-18; 31X10.50-15; 31X11.50-16.5; 325/70-17	
2335LW	305/65-17; 305/70-16; 35X13.50-16	7.7
2337LW	315/75-16; 295/40-24; 35X12.50-17; 33X14.50-15	7.7

* 3.7mm Diamond square link chains



2500Q

Stock#	Fitting Tire Size	Wt./pair(kg)
2514Q	245/70-19.5; 255/85-16; 265/70-18; 275/65-17; 285/75-16; 31X12.50-15; 32X11.50-15; 33X10.50-15	12.2
	235/75-17.5; 275/45-22; 295/65-16; 32X12.50-15; 32X12.50-16.5; 33X9.50-15; 35X10.50-15	
2515Q	215/70-16; 215/70-17.5; 215/75-15; 215/75-16; 225/70-15; 225/75-15; 8.75-16.5	10.4
2517Q	225/55-18; 225/70-16; 225/70-17; 225/75-16; 235/60-18; 235/70-15; 235/75-15;245/60-17	10.4
	225/70-17.5; 225/85-16; 255/55-17; 295/30-19	
2519Q	215/85-16; 225/75-17; 235/65-18; 245/60-18; 255/55-18; 255/70-16; 275/60-15; 275/60-16	11.8
	215/75-17.5; 225/55-19; 225/60-14; 225/65-18; 235/50-19; 235/65-17; 235/70-16; 235/70-17; 235/75-16; 235/80-16;235/80-17;	
	245/45-20; 245/55-19; 245/65-17; 245/70-15; 245/70-16; 255/35-22; 255/45-20; 255/60-17; 255/65-16;255/65-17;255/70-15;	
	265/45-20; 265/55-17; 265/60-17; 265/65-16; 265/70-15; 265/75-15; 265/85-16; 275/45-18; 275/45-19;275/50-17;275/55-16;275/55-17	
	275/70-17.5; 305/75-15; 30X9.50-15; 31X9.50-15; 325/60-15; 32X9.50-15; 9.50-16.5; 275/35-20;275/45-18;285/30-19;295/30-20;7.50-16	
2521Q	235/85-16; 245/70-17; 255/55-19; 255/75-16; 265/60-18; 265/75-17; 275/65-16; 275/70-16	11.8
	275/40-20; 245/70-17.5; 225/70-19.5; 225/75-17.5; 235/75-17; 235/80-18; 245/50-20; 245/75-15; 245/75-17; 255/50-20; 255/55-20; 255/60-18; 255/60-19	
	255/65-18; 255/70-17; 265/35-22; 265/40-22; 265/55-16; 265/65-17; 265/70-17; 265/75-16; 275/45-20; 275/55-18; 275/70-17; 295/40-20; 295/75-16; 315/35-20	
2527Q	12-16.5; 255/70-18; 255/75-15; 255/75-17; 265/65-18; 285/55-18; 285/60-17; 285/60-18	12.7
	265/45-22; 265/50-20; 275/55-19; 285/35-22; 285/40-22; 285/70-19.5; 295/45-20; 305/40-22; 305/85-16;32X11.50-16.5;275/55-19	
2529Q	245/75-16; 255/65-15; 265/70-16; 275/60-17; 275/60-18; 285/50-18; 285/70-15; 31X11.50-15	12.2
	205/75-17.5; 245/85-15; 255/50-19; 265/50-19; 265/70-19.5; 285/45-19; 295/45-18; 31X10.50-15; 31X11.50-16.5;325/70-17	
2533Q	265/60-20; 275/55-20; 275/60-20; 275/65-18; 285/50-20; 285/65-18; 285/70-17; 35X13.50-15	11.3
	285/45-22; 33x13.50-16	
2536Q	275/65-20; 285/65-20; 285/70-18; 285/75-17; 295/65-18; 295/70-17; 315/70-17; 35X12.50-15	12.7
	285/40-24; 285/50-22; 285/55-20; 285/75-18; 295/40-24; 305/35-24; 305/45-22; 305/50-20	
	305/55-20; 305/60-18; 305/65-17; 305/70-16; 305/70-17; 315/75-16; 325/60-18; 35X12.50-16.5	
2539Q	305/70-18; 325/60-20; 35X12.50-17; 365/65-16; 37X12.50-17; 315/60-20; 325/50-22; 37X12.50-18	13.6

* 5.5mm Diamond square link chains



1500Q

Stock#	Fitting Tire Size	Wt./pair(kg)
1505Q	155/60-13; 165/60-13; 145/70-13; 135/80-13	4.1
1510Q	175/60-13; 165/65-13; 155/70-13; 145/80-13; 155/65-14; 145/70-14	4.1
1515Q	145/70-15; 155/70-14; 165/60-14; 165/65-14; 175/60-14; 185/50-14; 185/55-14; 195/55-13;	4.1
	155/80-13; 165/70-13; 165/75-13; 175/65-13; 185/60-13	
1520Q	155/70-15; 165/60-15; 165/70-14; 175/55-15; 175/65-14; 185/60-14; 195/45-15; 195/60-13;	4.1
1525Q	165/80-13; 175/70-13; 185/65-13	4.5
	175/65-15; 185/60-15; 195/50-15; 195/55-14; 205/45-16; 205/50-15; 205/55-14; 215/40-16	
	165/65-15; 165/70-15; 165/75-14; 165/80-14; 175/60-15; 175/70-14; 175/75-13; 175/75-14;	
1530Q	175/80-13	4.5
	185/55-15; 185/65-14; 185/70-13; 185/75-13; 195/45-16; 195/55-15; 195/60-14; 195/65-13;	
1535Q	195/75-13; 205/40-16; 205/60-13	4.5
	165/75-16; 165/80-15; 185/65-15; 185/75-14; 195/60-15; 195/65-14; 205/40-17; 205/60-14	
1540Q	175/70-15; 185/70-14; 185/80-13; 190/65-15; 195/70-13; 205/65-13; 215/60-13	5
	195/60-16; 195/65-15; 205/60-15; 215/40-17; 215/50-15; 215/55-15; 225/50-15; 225/55-14	
	235/60-13; 205/70-13; 215/60-14; 205/65-14; 195/70-14; 195/75-14; 185/80-14; 205/55-15	
1542Q	185/70-15; 175/75-15; 185/75-15; 215/45-16; 205/50-16; 185/55-16; 185/65-390; 190/65-390	5
	225/60-14; 215/65-14; 215/60-15; 205/65-15; 195/75-15; 225/45-16; 235/40-17; 215/45-17	
1545Q	175/75-16; 195/70-15; 205/55-16; 205/70-14; 205/75-14; 225/55-15; 225/65-14; 245/50-14	5
	205/60-16; 235/35-18; 215/35-19	
1547Q	195/80-15; 205/50-17; 205/70-15; 215/55-17; 215/65-15; 225/45-17; 225/50-16; 235/45-17;	5.9
	27X8.50-14; 215/55-16;	
1550Q	215/60-16; 215/70-14; 215/75-14; 220/65-390; 225/30-20; 225/35-19; 225/40-19; 225/70-14;	5.9
	235/55-15; 235/60-14; 245/35-18; 265/50-14	
1553Q	205/70-16; 215/45-18; 215/50-17; 225/55-16; 225/60-15; 235/40-18; 245/40-17; 255/40-17	5.9
	205/75-15; 215/40-18; 225/40-18; 225/50-17; 235/30-20; 235/35-19; 245/45-17; 245/60-14	
1555Q	205/75-16; 215/70-15; 215/70-16; 225/60-16; 235/60-15; 235/60-16; 245/40-18; 265/40-17;	5.9
	215/65-16; 215/75-15; 225/35-20; 225/45-18; 225/55-17;	
1555Q	225/75-14; 235/35-20; 235/50-17; 235/70-14; 245/30-20; 245/35-19; 245/35-20; 245/45-18;	5.9
	255/35-18; 255/35-19; 255/60-14; 265/30-19; 265/35-18; 275/35-18	
1555Q	215/55-18; 215/60-17; 225/50-18; 225/65-16; 235/55-17; 245/60-15; 255/45-17; 265/50-15;	5.9
	225/55-18	
1555Q	225/70-15; 235/45-18; 235/50-18; 245/40-19; 245/50-17; 245/70-15; 255/30-20; 255/40-18;	5.9
	265/40-18; 275/30-19; 275/40-17	
1555Q	215/65-17; 25/70-17; 225/75-16; 235/65-16; 245/50-16; 255/50-16; 255/70-15; 275/60-15;	5.9
	225/60-17; 225/60-18; 225/65-17; 225/75-15	
1555Q	235/30-22; 235/50-19; 235/55-19; 235/65-15; 235/65-17; 235/70-15; 235/710-460; 235/75-15;	5.9
	245/40-20	
1555Q	245/70-14; 255/35-20; 255/40-19; 255/50-17; 255/55-16; 255/60-15; 265/35-19; 265/35-20;	5.9
	275/30-20; 275/35-19; 275/40-18; 275/50-15	





QV1



QV3



QV4



QV5

* QV1-QV5 Passenger cars



Cable Chain

Stock#	Fitting Tire Size	Wt./pair(kg)
QV119	205/60-13;195/65-13;185/70-13;165/80-13;175/80-13;205/50-14;195/55-14;185/60-14;	3.7
	195/60-14;175/65-14;165/75-14;175/75-14;185/65-14;175/70-14;165/80-14;195/50-15;	
	185/55-15;175/60-16;165/65-15;175/65-15;165/70-15;155/80-15;185/50-16;175/55-16	
QV123	245/50-13;225/60-13;195/70-13;185/80-13;215/50-14;235/50-14;215/55-14;215/60-14;	3.9
	195/65-14;185/70-14;175/80-14;205/50-15;215/50-15;195/55-15;185/60-15;185/65-15;	
	165/80-15;205/45-16;215/45-16;195/50-16;185/55-16;175/60-16;205/40-17;175/55-17	
QV127	235/60-13;205/70-13;245/50-14;225/55-14;225/60-14;205/65-14;195/70-14;225/50-15;	3.9
	235/50-15;205/55-15;195/60-15;205/50-16;185/60-16;215/40-17;205/45-17;215/35-18;	
	205/40-18;200/60-390	
QV129	205/70-14;195/75-14;195/65-15;175/80-15;195/55-16;195/60-16;185/65-16;195/65-16;	4.0
	195/45-17;205/60-390	
QV131	255/50-14;215/65-14;205/75-14;185/80-14;245/50-15;205/60-15;205/65-15;195/70-15;	4.1
	215/70-15;185/75-15;195/75-15;215/50-16;225/50-16;205/55-16;215/55-16;205/60-16;	
	175/75-16;175/80-16;245/40-17;215/45-17;205/50-17;;205/55-17;215/40-18;215/45-18	
QV133	215/55-15;225/55-15;215/60-15;225/60-15;205/70-15;205/75-15;225/45-16;205/70-16;	4.3
	225/40-17;235/40-17;225/45-17;215/50-17;225/35-18;235/35-18;225/40-18;	
QV135	265/50-14;255/55-14;245/60-14;215/70-14;225/70-14;215/75-14;255/50-15;235/60-15;	4.3
	205/65-15;215/65-15;195/75-15;195/80-15;255/45-16;215/60-16;215/65-16;185/75-16;	
	205/60-17.5;285/30-18;255/35-18;220/65-390;27X8.50-14;27X8.50-15;	
QV137	235/60-14;235/55-15;225/70-15;235/50-16;225/55-16;205/65-15;255/40-17;235/45-17;	4.4
	245/45-17;225/50-17;215/55-17;235/40-18;235/35-19;	
QV139	275/60-14;275/50-15;225/65-15;215/75-15;225/75-15;245/50-16;225/60-16;235/60-16;	4.4
	215/70-16;195/80-16;265/40-17;235/50-17;245/50-17;225/55-17;215/60-17;215/65-17;	
	245/40-18;225/45-18;235/45-18;225/50-18;215/55-18;225/40-19;245/40-19;245/35-20	
QV143	215/85-15;255/50-16;255/60-16;225/65-16;235/65-16;215/75-16;235/55-17;225/60-17;	4.6
	235/60-17;225/65-17;245/45-18;255/45-18;235/50-18;225/55-18;255/35-19;255/40-19;	
	285/40-19;235/45-19;245/45-19;285/30-20;255/35-20;245/40-20;235/45-20;245/30-22	
QV311	135/80-13; 145/80-13; 155/60-15; 155/65-14; 165/70-13; 175/55-14; 175/60-13; 185/50-14; 155/70-13; 155/80-12; 165/60-14; 165/65-13	4.1
QV315	145/65-15; 155/70-15; 165/60-15; 165/65-14; 175/55-15; 175/60-14; 185/55-14; 195/50-14	4.5
	155/80-13; 165/70-14; 165/70-360; 165/75-13; 165/80-13; 175/65-13; 175/65-14; 175/70-13; 185/60-13; 185/65-13; 195/55-13; 195/60-13	
QV319	155/80-15; 165/70-15; 175/55-16; 175/65-15; 185/50-16; 195/50-15; 195/45-16; 205/45-15; 165/65-15; 165/70-365; 165/75-14; 165/80-14	4.5
	175/60-15; 175/70-14; 175/75-13; 175/75-14; 175/80-13; 180/65-390; 185/55-15; 185/60-14; 185/65-14	
	185/70-13; 195/55-14; 195/60-14; 195/65-13; 205/50-14; 205/60-13	
QV323	175/60-16; 185/65-15; 185/70-15; 195/50-16; 195/55-16; 205/50-15; 215/50-15; 235/50-14; 165/80-15; 175/55-17; 175/70-15	4.5
	175/80-14; 185/55-16; 185/60-15; 185/65-365; 185/65-390; 185/70-14; 185/70-365; 185/75-13; 185/75-14; 185/80-13; 190/65-390	
	195/45-17; 195/55-15; 195/65-14; 195/70-13; 195/75-14; 200/60-365; 205/40-17; 205/45-16; 205/55-14; 205/60-14; 215/40-16;	
	215/45-15; 215/45-16; 215/50-14; 215/55-14; 215/60-13; 215/60-14; 220/45-15; 225/35-19; 225/50-14; 225/60-13; 235/35-19; 235/50-13	



Cable Chain

Stock#	Fitting Tire Size	Wt./pair(kg)
QV327	185/60-16; 195/60-15; 205/45-17; 205/50-16; 215/40-17; 215/55-15; 205/40-18; 225/60-14	4.5
	195/70-14; 200/60-390; 205/55-15; 205/65-14; 205/70-13; 215/35-18; 225/50-15;225/55-14; 235/50-15; 235/60-13; 245/50-14	
QV329	175/80-15; 185/65-16; 195/60-16; 195/65-15; 195/70-15; 205/55-17; 205/65-15; 205/70-14; 195/65-16; 205/60-390; 225/35-18	5.0
QV331	195/75-15; 205/50-17; 205/60-16; 215/45-18; 215/50-17; 225/50-16; 225/60-15; 245/45-16; 175/75-16; 175/80-16; 185/70-15.5; 185/75-15	5.0
	185/80-14; 205/55-16; 205/60-15; 205/75-14; 215/35-19; 215/40-18; 215/45-17; 215/50-16; 215/55-16	
QV335	215/60-15; 215/65-14; 220/55-390; 235/35-18; 240/45-415; 245/35-18; 245/40-17; 245/50-15; 255/50-14	5.0
	195/80-15; 205/70-16; 215/65-16; 225/45-17; 225/55-16; 235/45-17; 235/60-15; 255/45-16; 185/75-16; 205/60-17.5; 205/65-16	
QV339	205/70-15; 205/75-15; 215/55-17; 215/60-16; 215/65-15; 215/70-14; 215/70-15; 215/75-14; 220/65-390; 225/30-20; 225/40-18	5.0
	225/45-18; 225/50-17; 225/70-14; 235/40-18; 235/50-16; 235/55-15; 235/60-14; 245/60-14; 255/35-18; 255/50-15; 265/50-14; 285/30-18	
QV343	215/55-18; 215/70-16; 225/60-16; 235/55-16; 245/50-17; 245/60-15; 265/40-17; 275/50-15; 195/75-16; 195/80-16; 205/55-18	5.0
	205/80-15.5; 215/60-17; 215/65-17; 215/75-15; 220/60-16; 225/40-19; 225/45-19; 225/50-18; 225/55-17; 225/55-18; 225/60-17	
QV429	225/65-15; 225/65-16; 225/75-14; 235/30-20; 235/35-20; 235/40-19; 235/45-18; 235/50-17; 235/60-16; 235/65-15; 235/70-14; 245/30-20	4.6
	245/35-19; 245/35-20; 245/40-18; 245/40-19; 245/50-16; 245/55-17; 245/70-14; 255/45-17; 265/30-19	
QV435	265/35-18; 265/35-19; 265/50-15; 275/60-14; 285/35-18; 285/40-17; 295/30-18; 295/50-15	4.6
	205/75-16; 215/75-16; 225/70-16; 235/55-17; 235/70-15; 245/60-16; 255/55-17; 255/60-16; 205/65-17.5; 205/75-17.5; 205/80-16	
QV441	215/80-15; 215/80-16; 215/85-15; 225/35-20; 225/65-17; 225/70-15; 225/75-15; 225/75-16; 235/45-19; 235/45-20	4.9
	235/50-18; 235/55-18; 235/60-17; 235/65-16; 235/70-17; 245/35-21; 245/40-20; 245/45-17; 245/45-18; 245/45-19; 245/50-18	
QV447	245/65-15; 245/65-16; 245/70-15; 255/30-20; 255/35-19; 255/35-20; 255/40-18; 255/40-19; 255/45-18; 255/50-16	5.1
	255/50-17; 255/50-18; 255/55-16; 255/60-14; 255/60-15; 255/65-15; 265/35-20; 265/40-18	
QV451	265/50-16; 265/60-14; 275/30-19; 275/35-18; 275/35-19; 275/40-17; 275/40-18; 285/35-19; 285/40-18; 285/40-19	5.2
	235/75-15;245/75-15;265/60-16;235/70-16;215/75-16;225/75-16;215/80-16;215/85-16; 245/60-17;235/65-17;215/70-17;225/70-17;225/75-17;265/45-18;235/55-18;245/55-18; 225/60-18;235/60-18;235/50-19;225/55-19;235/55-19;265/40-20;235/45-20;245/45-20; 275/60-15;255/70-15;255/65-16;245/70-16;255/70-16;245/75-16;275/50-16;245/65-17; 235/70-17;235/75-17;285/45-18;255/55-18;245/60-18;275/40-19;255/50-19;245/55-19; 275/40-20;255/45-20;245/50-20;235/55-20;295/35-21;265/35-22;245/40-22;30X9.50-15; 265/75-15;275/60-16;275/65-16;265/70-16;235/80-16;235/85-16;275/55-17;275/60-17; 255/65-17;265/65-17;245/70-17;245/75-17;275/55-18;255/60-18;265/60-18;255/65-18; 275/45-19;255/60-19;265/45-20;275/45-20;285/45-20;255/50-20;31X10.50-15; 285/70-15;275/75-15;275/70-16;255/75-16;265/75-16;275/75-16;275/65-17;255/70-17; 265/70-17;275/70-17;235/80-17;285/55-18;305/55-18;275/60-18;265/65-18;245/70-18; 255/70-18;275/55-19;255/65-19;265/50-20;275/50-22;255/55-20;225/75-20;255/50-21; 285/70-15;295/70-15;285/70-16;315/70-16;345/55-17;275/70-17;255/75-17;265/75-17; 285/60-18;295/60-18;275/65-18;265/70-18;245/75-18;285/50-20;295/50-20;325/50-20; 275/55-20;265/60-20;305/40-22;285/45-22;305/40-23;295/35-24;	

Stock#	Fitting Tire Size	Wt./pair(kg)
QV539	155/80-15; 165/70-15; 175/65-15; 185/55-16; 205/45-16; 215/45-16; 225/45-16; 235/50-14	5.0
	165/65-15; 165/70-365; 165/75-14; 165/80-14; 175/55-16; 175/55-17; 175/60-15; 175/70-14; 175/70-15; 175/75-13; 175/75-14; 175/80-13	
QV547	180/65-390; 185/50-16; 185/55-15; 185/60-15; 185/65-14; 185/65-15; 185/65-365; 185/70-13; 185/70-14; 185/70-365; 185/75-13	5.4
	185/75-14; 185/80-13; 195/45-16; 195/45-17; 195/50-15; 195/50-16; 195/55-15; 195/55-16; 195/60-14; 195/60-15; 195/65-13; 195/65-14	
QV555	195/70-13; 195/75-14; 200/60-365; 205/40-16; 205/40-17; 205/40-18; 205/45-15; 205/45-17; 205/50-15; 205/50-16; 205/55-14; 205/55-15	5.4
	205/60-13; 205/60-14; 205/65-14; 205/70-13; 215/35-18; 215/40-16; 215/40-17; 215/45-15; 215/50-14; 215/50-15; 215/55-14	
QV563	215/55-15; 215/60-13; 215/60-14; 220/45-15; 225/35-19; 225/40-17; 225/50-14; 225/50-15; 225/55-14; 225/60-13; 235/35-19; 235/50-13	5.4
	185/70-15; 195/75-15; 205/60-16; 215/60-15; 225/45-17; 225/50-16; 235/60-16; 245/45-16	
QV571	165/80-15; 175/60-16; 175/75-16; 175/80-14; 175/80-15; 185/60-16; 185/65-16; 185/65-390; 185/70-15.5; 185/75-15; 185/80-14	5.4
	190/65-390; 195/60-16; 195/65-15; 195/65-16; 195/70-14; 195/70-15; 200/60-390; 205/50-17; 205/55-16; 205/60-15; 205/60-390	
QV583	205/65-15; 205/70-14; 215/35-19; 215/40-18; 215/45-17; 215/45-18; 215/50-16; 215/50-17; 215/55-16; 215/65-14; 215/70-14	5.4
	220/55-390; 225/35-18; 225/40-18; 225/55-15; 225/60-14; 225/60-15; 235/35-18; 235/40-17; 235/50-15; 240/45-415; 245/50-13; 245/50-14; 255/50-14	
QV591	205/70-16; 215/60-16; 225/60-16; 235/50-16; 245/45-17; 255/60-16; 265/50-16; 275/40-17	5.4
	175/80-16; 185/75-16; 205/55-17; 205/60-17.5; 205/65-16; 205/70-15; 205/75-14; 205/75-15; 215/55-17; 215/65-15; 215/70-15	
QV603	215/75-14; 220/60-16; 220/65-390; 225/30-20; 225/40-19; 225/45-18; 225/50-17; 225/50-18; 225/55-16; 225/55-17; 225/65-15; 225/70-14	5.4
	235/30-20; 235/35-20; 235/40-18; 235/40-19; 235/45-17; 235/45-18; 235/50-17; 235/55-15; 235/55-16; 235/60-14; 235/60-15; 245/30-20	
QV615	245/35-18; 245/35-19; 245/35-20; 245/40-17; 245/40-18; 245/40-19; 245/50-15; 245/50-16; 245/50-17; 245/55-16; 245/60-14; 245/60-15	5.4
	255/35-18; 255/35-19; 255/40-17; 255/40-18; 255/45-16; 255/45-17; 255/50-15; 255/50-16; 255/60-14; 265/30-19; 265/35-18; 265/40-17	
QV627	265/40-18; 265/50-14; 265/50-15; 265/60-14; 275/35-18; 275/35-19; 275/50-15; 275/60-15; 285/30-18; 285/35-17; 285/35-18; 285/40-15	5.4
	285/40-17; 295/30-18; 295/35-18; 8.75-16.5	
QV639	215/60-17; 225/70-16; 235/60-17; 245/60-16; 255/55-17; 275/45-18; 27X8.50-14; 30X9.50-16.5	5.4
	205/75-17.5; 205/80-16; 225/60-18; 235/75-15; 255/70-15; 265/55-16; 265/65-16; 27X9.50-15; 285/70-15; 28X8.50-15; 29X9.50-15	
QV651	29X9.50-16; 195/75-16; 195/80-15; 195/80-16; 205/55-18; 205/65-17.5; 205/75-16; 205/80-15.5; 215/65-17; 215/70-16	5.4
	215/75-15; 215/80-15; 225/35-20; 225/45-19; 225/55-18; 225/60-17; 225/65-16; 225/70-15; 225/75-14; 225/75-15; 235/45-19	
QV663	235/50-18; 235/55-17; 235/55-18; 235/60-16; 235/65-15; 235/65-16; 235/70-14; 235/70-15; 245/35-21; 245/40-20; 245/45-18	5.4
	245/45-19; 245/50-18; 245/55-17; 245/65-15; 245/65-16; 245/70-14; 245/70-15; 255/30-20; 255/35-20; 255/40-19; 255/40-20	
QV675	255/45-18; 255/45-19; 255/50-17; 255/50-18; 255/55-16; 255/60-15; 255/65-15; 265/35-19; 265/35-20; 275/30-21; 275/35-20	5.4
	275/40-18; 275/40-19; 275/60-14; 275/60-15; 285/30-20; 285/35-19; 285/40-18; 295/30-19; 295/30-20; 295/35-19; 295/50-15; 335/35-17	
QV687	215/70-17; 215/75-16; 225/60-18; 225/65-17; 225/70-16; 235/60-18; 255/60-17; 29X9.50-15	5.4
	205/80-16; 215/55-18; 225/55-19; 225/75-16; 235/30-22; 235/45-20; 235/50-19; 235/65-17; 235/70-16; 235/75-15	
QV699	245/30-22; 245/50-19; 255/35-22; 255/50-19; 255/65-16; 255/70-15; 265/40-20; 265/45-18	5.4
	265/60-16; 275/30-19; 275/30-20; 285/30-19; 285/40-19; 7-17.5	



Stock#	Fitting Tire Size	Wt./pair(kg)
QV575	10-16.5LT; 215/80-16; 225/70-17; 235/75-16; 245/70-17; 255/75-16; 265/70-15; 31X10.50-15	5.9
	275/40-20; 275/75-15; 205/75-17.5; 215/70-17.5; 215/75-17.5; 215/80-17; 215/85-15; 215/85-16; 225/55-20; 225/60-19; 225/65-18	
	225/75-17; 225/75-17.5; 225/85-16; 235/55-19; 235/55-20; 235/65-18; 235/70-17; 235/80-16; 245/40-22; 245/45-20; 245/45-22	
	245/50-20; 245/55-19; 245/60-18; 245/65-17; 245/70-16; 245/75-15; 245/75-16; 255/30-22; 255/45-20; 255/55-18; 255/65-17	
	255/70-16; 265/35-22; 265/45-20; 265/45-21; 265/50-19; 265/55-17; 265/55-18; 265/60-17; 265/65-16	
QV579	265/75-15; 275/45-19; 275/50-17; 275/55-17; 275/60-16; 285/45-19; 285/50-18; 295/30-22; 295/45-18; 30X9.50-15; 8.75-16.5	5.9
	225/70-18; 225/70-19.5; 235/70-17; 245/70-18; 255/65-18; 265/70-16; 275/60-17; 31X11.50-15	
	245/70-17.5; 215/75-19.5; 225/75-19.5; 225/75-20; 225/80-17; 235/70-17.5; 235/70-18; 235/70-19.5; 235/75-17	
	235/75-17.5; 235/80-17; 235/85-16; 235/85-17; 245/60-20; 245/75-17; 245/75-17.5; 245/85-15; 245/85-16	
	255/50-20; 255/50-21; 255/55-19; 255/55-20; 255/60-18; 255/60-19; 255/65-19; 255/70-17; 255/70-18; 255/75-17	
	265/40-22; 265/50-20; 265/60-18; 265/60-20; 265/65-17; 265/65-18; 265/70-17; 265/75-16; 265/790-540A; 275/45-20	
	275/45-22; 275/50-19; 275/50-20; 275/55-18; 275/55-19; 275/60-18; 275/65-16; 275/65-17; 275/65-18; 275/70-16	
	275/70-17; 275/75-16; 285/35-22; 285/40-20; 285/40-22; 285/45-20; 285/45-21; 285/50-20; 285/55-19; 285/60-16	
	285/60-17; 285/60-18; 285/65-16; 285/70-15; 285/70-16; 285/75-15; 295/30-23; 295/35-21; 295/35-22; 295/40-20	
	295/40-21; 295/45-20; 295/50-20; 295/60-18; 295/65-16; 295/70-15; 305/35-22; 305/45-20; 31X10.50-16.5	
QV583	31X11.50-16.5; 32X9.50-15; 9.50-16.5; 285/35-24; 315/35-20; 7.50-16; 8x19.5	5.9
	12-16.5LT; 245/70-19.5; 255/80-17; 265/75-18; 275/55-20; 275/70-18; 285/75-17; 33X12.50-17	
	245/75-18; 255/85-16; 255/85-17; 265/65-20; 265/70-18; 265/70-19.5; 265/75-17; 265/80-16; 265/85-16; 275/50-22	
	275/60-20; 275/65-20; 275/70-19.5; 285/40-24; 285/45-22; 285/50-22; 285/55-20; 285/60-19; 285/65-17	
	285/65-18; 285/70-17; 285/70-18; 295/35-24; 295/45-22; 295/70-18; 305/35-24; 305/40-22; 305/50-20	
	305/70-16; 310/70-15; 315/35-24; 32X11.50-15; 33X10.50-15; 33X12.50-15; 33X9.50-15; 345/55-17; 275/30-24; 295/30-24	



Fabric Tire Chains

Fabric Emergency Tire Chains

Stock#	Fitting Tire Size					
	13"	14"	15"	16"	17"	18"
70	155/70R13	165/55R14	185/45R15			
	165/65R13	185/50R14				
	175/60R13					
	185/55R13					
	195/55R13					
71	165/70R13	165/60R14	155/60R15	195/40R16		
	175/65R13	175/60R14	175/50R15			
	185/60R13	185/55R14	185/50R15			
	195/60R13	205/50R14	195/45R15			
72	185/70R13	175/70R14	165/65R15	185/50R16		
	195/70R13	185/65R14	175/60R15			
		195/60R14	185/60R15			
73		205/60R14	195/55R15			
		175/80R14	165/80R15	195/60R16	205/50R17	205/45R18
		205/70R14	175/75R15	215/55R16	235/45R17	225/40R18
		215/65R14	185/70R15	235/50R16		
		235/60R14	195/65R15			
			215/60R15			
74			235/55R15			
		225/70R14	185/80R15	175/75R16	185/65R17	215/50R18
			195/75R15	185/75R16	215/55R17	235/45R18
			205/70R15	205/65R16	225/55R17	265/40R18
			215/70R15	215/65R16	245/50R17	
75			225/65R15	225/60R16		
			245/60R15	245/55R16		
		205/80R14	195/80R15	175/80R16	185/70R17	205/55R18
		215/75R14	205/75R15	205/70R16	215/60R17	225/50R18
		235/70R14	225/70R15	235/60R16	235/55R17	235/50R18
76			255/60R15	255/55R16	255/50R17	245/45R18
						255/45R18
	205/65R13	225/55R14	205/50R15	195/50R16	195/40R17	
	215/60R13		215/50R15	205/45R16	205/40R17	
	225/60R13		235/45R15	215/45R16	225/35R17	
77				225/40R16	245/35R17	
				255/35R16		
	205/70R13	185/70R14	185/65R15	185/55R16	175/55R17	205/40R18
	235/60R13	195/65R14	195/60R15	195/55R16	195/45R17	215/35R18
		205/65R14	205/55R15	205/50R16	205/45R17	225/35R18
78			215/60R14	215/50R16	215/40R17	235/35R18
			225/50R15	225/45R16	225/40R17	255/30R18
			255/45R15	255/40R16	235/40R17	
	185/80R13	185/75R14	205/60R15	185/60R16	215/45R17	215/40R18
		195/70R14	225/55R15	205/55R16	225/45R17	245/35R18
79		225/60R14	245/50R15	225/50R16	245/40R17	
				245/45R16		
		185/80R14	195/70R15	185/65R16	185/60R17	215/45R18
		195/75R14	205/65R15	195/65R16	205/55R17	225/45R18
		195/80R14	215/65R15	205/60R16	215/50R17	235/40R18
80		205/75R14	225/60R15	215/60R16	225/50R17	245/40R18
		215/70R14	235/60R15	225/55R16	235/50R17	
		245/60R14		235/55R16	245/45R17	
				245/50R16		
		215/80R14	215/75R15	195/75R16	225/60R17	245/50R18
81			225/75R15	215/70R16	245/55R17	
				225/65R16		
				245/60R16		
	155/80R13	165/70R14	155/65R15	175/50R16	215/35R17	
	175/70R13	175/65R14	165/60R15	195/45R16		
	185/65R13	185/60R14	175/55R15	205/40R16		
	195/65R13	195/55R14	185/55R15	215/40R16		
	205/60R13	205/55R14	195/50R15			
	225/55R13		215/45R15			





ATV Chains

Diamond Pattern with U-Grip Studs
Smooth Grip, Maximum Traction

Stock#	Fitting Tire Size	Wt./pair(kg)
146234	18 x 8,50	11.00
146335	185/88-12; 205/80-12; 21 x 10; 22x10; 22x11; 23x8; 23x8,50; 23x10; 23x10,50; 24x8; 24x9; 25x8; 25x8; 26x8	15.00
146362	20x10; 23X7	14.50
146382	255/60-10; 24x10; 24x11; 24x11,5; 25x10; 25x11; 270/60-12; 7 x14	16.00
146415	25x12; 25x12,5; 26x11; 27x10,5; 27x11	15.50
146418	25x13,5	16.00
146424	175-14 Vimek; 25 x 8,5 Vimek; 26x8-14 Polaris	17.00
146461	280/65-10; 26 x9; 26x10; 26x10,5; 26x12; 27x10; 27x9; 28x10	18.00
146483	320/60-12; Vimek 27 X11; 27x12; 28x12; 29,5x10	18.00
146486	28x9-15	16.50
146833	6,00-14	15.00
146834	6,00-16	18.00
146835	9,00-13	20.00
146963	260/90-13; 8X16; 9,00-16	22.00



V-Bar Ladder Style with Ice Breaker. Also available with 2-link spacing.

Stock#	Fitting Tire Size	Wt./pair(kg)
ATV-A	20X10.00-9; 21X10.00-8; 22X10.00-10; 22X10.00-8; 22X10.00-9; 22X10.0-9; 22X10-10; 22X11.00-10; 22X11.00-8; 22X11.00-9; 22X7.00-10; 22X7-10; 22X9.00-10; 22X9.00-8; 23X10.00-12; 23X10-10; 23X8.00-11; 23X8-10; 24X8.00-11; 25x11.00-10; 25X11.00-9; 25X8.00-12	6.00
ATV-B	22X11.00-10; 24x10.00-11; 24x10.00-12; 24x11.00-10; 24x11.00-12; 24X9.00-11; 24X9.00-12; 25x10.00-12; 25X11.00-9; 25X12.00-9; 25X8.00-12	6.60
ATV-C	15x10-12; 205/80R12; 23x11-10; 24x10.00-11; 24x10.00-12; 24x11.00-10; 24x11.00-9; 24x11.50-10; 24x12.00-12; 24X13.00-9; 25x10.00-10; 25x10.00-11; 25x10.00-12; 25x11.00-10; 25x11.00-12; 25X11-10; 25X11-12; 25x12.00-10; 25X12.00-9; 26x10.00-12; 26X10-12; 26x10.50-12; 26x11.00-12	8.30
ATV-D	25x12.5-10; 25 x11-12; 26x11-12; 26x12-12; 27x11-12; 27x12-12; 28x12-12; 27x11-14	9.50

This fit chart is a guide only. Actul fitments and clearance may vary.Chains may need slight modification to fit specific needs.



Forklift

D5.5 Industrial Forklift Tire Chain

Alloy square link
Diamond pattern

Stock#	Fitting Tire Size	Wt./pair(kg)
103004	10,00-15	20.8
103011	10,5-18	21.8
103014	10-16,5	17.9
103048	12-16,5	18.7
103077	13,6-16	22.7
103248	28x9,00	14.5
103461	27x10	14.7
103549	31x10,50	16.2
103415	25x12,5	15.2
103919	7,00-12	14.0



ATV